

3-31-00

A

Customer No. 20350
TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
(650) 326-2400

Attorney Docket No. 19880-001620US
Client Ref No. 247-CIP1
"Express Mail" Label No. EL474300405US
Date of Deposit: March 29, 2000

ASSISTANT COMMISSIONER FOR PATENTS
BOX PATENT APPLICATION
Washington, D.C. 20231

I hereby certify that this is being deposited with the United States
Postal Service "Express Mail Post Office to Addressee" service
under 37 CFR 1.10 on the date indicated above, addressed to:

Assistant Commissioner for Patents
Washington, D.C. 20231

By: Ron Anton

09/538562
03/29/00

03/29/00

03/29/00 U.S. P.O.

Submitted herewith for filing under 37 CFR 1.53(b) is the
☐ patent application of
☐ continuation patent application of
☐ divisional patent application of
☒ continuation-in-part patent application of

Inventor(s)/Applicant Identifier: Sadik Bayrakeri et al.

For: DEMAND-CAST SYSTEM AND BANDWIDTH MANAGEMENT FOR DELIVERY OF INTERACTIVE PROGRAMMING

☒ This application claims priority from each of the following Application Nos./filing dates:
09/524,854 / March 14, 2000; 60/178,100 / January 26, 2000
the disclosure(s) of which is (are) incorporated by reference.
Please amend this application by adding the following before the first sentence: "This application is a ☐ continuation ☐ continuation-in-part of and claims the benefit of U.S. Provisional Application No. 60/_____, filed _____, the disclosure of which is incorporated by reference."

Enclosed are:

- ☒ 35 page(s) of specification
- ☒ 3 page(s) of claims
- ☒ 1 page of Abstract
- ☒ 19 sheet(s) of ☐ formal ☒ informal drawing(s).
- An assignment of the invention to _____
- ☒ A ☐ signed ☒ unsigned Declaration & Power of Attorney
- A ☐ signed ☐ unsigned Declaration.
- A Power of Attorney.
- A verified statement to establish small entity status under 37 CFR 1.9 and 37 CFR 1.27 ☐ is enclosed ☐ was filed in the prior application and small entity status is still proper and desired.
- A certified copy of a _____ application.
- Information Disclosure Statement under 37 CFR 1.97.
- A petition to extend time to respond in the parent application.
- Notification of change of ☐ power of attorney ☐ correspondence address filed in prior application.
- ☒ Postcard

In view of the Unsigned Declaration as filed with this application and pursuant to 37 CFR §1.53(f),
Applicant requests deferral of the filing fee until submission of the Missing Parts of Application.

DO NOT CHARGE THE FILING FEE AT THIS TIME.

James K. Okamoto

Reg No.: 40,110
Attorneys for Applicant

Telephone:
(650) 326-2400

Facsimile:
(650) 326-2422

PATENT APPLICATION
DEMAND-CAST SYSTEM AND BANDWIDTH MANAGEMENT FOR
DELIVERY OF INTERACTIVE PROGRAMMING

Inventors:

Donald F. Gordon, a citizen of United States, residing at,
465 Gabilan Street #10
Los Altos, CA 94022

Sadik Bayrakeri, a citizen of Turkey, residing at,
733 Shell Boulevard #104
Foster City, CA 94404

Edward A. Ludvig, a citizen of Canada, residing at,
831 Canyon Road
Redwood City, CA 94061

Eugene Gershtein, a citizen of United States, residing at,
401B Cork Harbour Circle
Redwood Shores, CA 94065

Jeremy S. Edmonds, a citizen of United States, residing at,
18923 Sydney Circle
Castro Valley, CA 94546

John P. Comito, a citizen of United States, residing at,
907 Pleasant Hill Road
Redwood City, CA 94061

Alfred Li, a citizen of Hong Kong, residing at,
161 Positano Circle
Redwood City, CA 94065

Assignee:

DIVA Systems Corporation
800 Saginaw Drive
Redwood City, CA 94063

Entity: Small business concern

TOWNSEND and TOWNSEND and CREW LLP
Two Embarcadero Center, 8th Floor
San Francisco, California 94111-3834
Tel: 650-326-2400

RELATED APPLICATIONS

BACKGROUND OF THE INVENTION

1. Field of the Invention

The invention relates to communications systems in general. More specifically, the invention relates to video communications systems and interactive program guides for video programming.

2. Description of the Background Art

Over the past few years, the television industry has seen a transformation in a variety of techniques by which its programming is distributed to consumers. Cable television systems are doubling or even tripling system bandwidth with the migration to hybrid fiber coax (HFC) cable plant. Customers unwilling to subscribe to local cable systems have switched in high numbers to direct broadcast satellite (DBS) systems. And, a variety of other approaches have been attempted focusing primarily on high bandwidth digital technologies, intelligent two way set top terminals, or other methods of trying to offer service differentiated from standard cable and over the air broadcast systems.

With this increase in bandwidth, the number of programming choices has also increased. Leveraging off the availability of more intelligent set top terminals, several companies such as Starsight Telecast Inc. and TV Guide, Inc. have developed elaborate systems for providing an interactive listing of a vast array of channel offerings, expanded textual information about individual programs, the ability to look forward to plan television viewing as much as several weeks in advance, and the option of automatically programming a VCR to record a future broadcast of a television program.

Unfortunately, the existing program guides have several drawbacks. They tend to require a significant amount of memory, some of them needing upwards of one megabyte of memory at the set top terminal (STT). They are very slow to acquire their current database of programming information when they are turned on for the first time or are subsequently restarted (e.g., a large database may be downloaded to a STT using only a vertical blanking interval (VBI) data insertion technique). Disadvantageously, such slow database acquisition may result in out of date database information or, in the case of a pay per view (PPV) or video on demand (VOD) system, limited scheduling flexibility for the information provider.

The use of compression techniques to reduce the amount of data to be transmitted may increase the speed of transmitting program guide information. In several communications systems, the data to be transmitted is compressed so that the available transmission bandwidth is used more efficiently. For example, the Moving Pictures Experts Group (MPEG) has promulgated several standards relating to digital data delivery systems. The first, known as MPEG-1 refers to ISO/IEC standards 11172 and is incorporated herein by reference. The second, known as MPEG-2, refers to ISO/IEC standards 13818 and is also incorporated herein by reference. A compressed digital video system is described in the Advanced Television Systems Committee (ATSC) digital television standard document A/53, and is incorporated herein by reference.

The above-referenced standards describe data processing and manipulation techniques that are well suited to the compression and delivery of video, audio and other information using fixed or variable rate digital communications systems. In particular, the above-referenced standards, and other "MPEG-like" standards and techniques, compress, illustratively, video information using intra-frame coding techniques (such as run-length coding, Huffman coding and the like) and inter-frame coding techniques (such

as forward and backward predictive coding, motion compensation and the like). Specifically, in the case of video processing systems, MPEG and MPEG-like video processing systems are characterized by prediction-based compression encoding of video frames with or without intra- and/or inter-frame motion compensation encoding.

5 However, the MPEG-1 and MPEG-2 standards have, in some instances, very strict elementary stream and transport stream formats, causing usage of extra bandwidth for certain applications. For example, if a number of interactive program guide (IPG) pages were created as video sequences, only limited number of pages could be encoded into a transport stream(s) at a specified bandwidth.

10 Therefore, it is desirable to provide techniques for more efficiently utilizing a limited and finite bandwidth for transmitting program guide video sequences to set-top terminals.

SUMMARY OF THE INVENTION

15 The present invention provides a system for more efficient utilization of the finite bandwidth available for distribution of interactive program guide (IPG) video sequences. The system utilizes a session manager and a transport stream generator to enable a set top terminal to access an entire array of guide pages from the IPG within the constraints imposed by the limited bandwidth available in the distribution network.

20 One embodiment of the present invention comprises a system that includes a session manager (SM) and a transport stream generator (TSG) within a distribution control center. The SM monitors and controls usage of demand-cast stream bandwidth within the distribution network. The TSG receives information from the SM on each demand-cast stream. The information includes which set top terminals, if any, are currently acquiring the stream. The TSG uses the information to control the demand-cast
25 streams multiplexed into the transport stream for distribution to the set top terminals.

BRIEF DESCRIPTION OF THE DRAWINGS

The teachings of the present invention can be readily understood by considering the following detailed description in conjunction with the accompanying drawings.

Figure 1 depicts an illustrative communications network 100 for distributing video sequences to a plurality of terminals in accordance with an embodiment of the present invention.

5 Figures 2-6 depicts various methods and topologies for demand-casting interactive program guide (IPG) pages in accordance with embodiments of the present invention.

Figure 2A is a flow chart showing a first push method 200 for demand-casting interactive program guide (IPG) pages in accordance with an embodiment of the present invention.

10 Figure 2B depicts a first push topology 250 for demand-casting IPG pages in accordance with an embodiment of the present invention.

Figure 3A is a flow chart showing a second push method 300 for demand-casting IPG pages in accordance with an embodiment of the present invention.

15 Figure 3B depicts a second push topology 350 for demand-casting IPG pages in accordance with an embodiment of the present invention.

Figure 4A is a flow chart showing a first pull method 400 for demand-casting IPG pages in accordance with an embodiment of the present invention.

Figure 4B depicts a first pull topology 450 for demand-casting IPG pages in accordance with an embodiment of the present invention.

20 Figure 5A is a flow chart showing a second pull method 500 for demand-casting IPG pages in accordance with an embodiment of the present invention.

Figure 5B depicts a second pull topology 550 for demand-casting IPG pages in accordance with an embodiment of the present invention.

25 Figure 6A is a flow chart showing a third pull method 600 for demand-casting of IPG pages in accordance with an embodiment of the present invention.

Figure 6B depicts a third pull topology 650 for demand-casting of IPG pages in accordance with an embodiment of the present invention.

Figure 6C is a flow chart showing a method 660 of terminating (or continuing) demand-casts in accordance with the third pull method 600.

Figure 7 depicts a two-way system 700 for efficient delivery of demand-cast video sequences in accordance with an embodiment of the present invention.

5 Figure 8 depicts an example of a set of IPG pages for constant broadcast and other IPG pages for demand-cast in accordance with a preferred embodiment of the present invention.

Figure 9 depicts an example of one frame taken from a video sequence that can be encoded using the present invention.

10 Figure 10 depicts a first implementational architecture 1000 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention.

15 Figure 11 depicts a second implementational architecture 1100 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention.

Figure 12 depicts a third implementational architecture 1200 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention.

20 Figure 13 depicts a fourth implementational architecture 1300 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention.

Figure 14 depicts an embodiment for the content of the demand-cast index table.

25 Figure 15 depicts one embodiment for the contents of the messages sent from the terminal 706 to the SM 702.

Figure 16 depicts one embodiment for the contents of the messages sent from the SM 702 to the TSG 704.

Figure 17 depicts one embodiment for the contents of the acknowledgement messages sent by the TSG 704 back to the SM 702.

Figure 18 depicts an example showing status of active demand-cast streams in an IPG multiplex.

5 Figure 19 illustrates the various scenarios for activation of a demand-cast stream.

Figure 20 illustrates an overall process by which a released stream may be converted to a passive stream.

DESCRIPTION OF THE SPECIFIC EMBODIMENTS

10

I. ILLUSTRATIVE COMMUNICATIONS NETWORK

Figure 1 depicts an illustrative communications network 100 for distributing video sequences to a plurality of terminals in accordance with an embodiment of the present invention. The illustrative network 100 comprises a cable distribution
15 network, but other types of distribution networks may also be used within the spirit and scope of the present invention.

The illustrative network 100 includes one or more head-ends 102, one or more centers for local neighborhood equipment 104, a plurality of distribution nodes 106, and a plurality of subscriber stations 108. The local neighborhood equipment (LNE) 104
20 may be located, for example, at remote hubs of a cable distribution network. The end-user terminals 108 may comprise, for example, interactive set-top terminals (STT) or other devices with similar interactive functionalities.

II. EXAMPLE METHODS AND TOPOLOGIES

In the present application, the demand-cast term is used to refer to the
25 process of managing and delivering content to one or more users depending on user demand for the content. Figures 2-6 depicts various methods and topologies for demand-casting interactive program guide (IPG) pages. The various methods/topologies are given for purposes of edification and are not meant to limit the scope of the present invention.

Figure 2A is a flow chart showing a first push method 200 for demand-casting interactive program guide (IPG) pages in accordance with an embodiment of the present invention. As described below, the method 200 includes four steps.

In a first step 202, a first set of IPG pages to be broadcast are
5 predetermined. The first set of IPG pages may comprise video sequences, for example, for a current time period. For instance, if the current time is 1:07 pm, then the current time period may include programming from 1:00 pm to 2:30 pm, assuming a 90 minute time period.

In a second step 204, a second set of IPG pages to be broadcast are
10 predetermined. The second set of IPG pages may comprise video sequences, for example, for a prime time period. Such a prime time period is a time period during which a large number of viewers typically watch TV programming. For example, the prime time period may include programming from 6:00 pm to 9:00 pm.

In a third step 206, bandwidth to broadcast the first and second sets of IPG
15 pages is allocated in the distribution system for that purpose. For example, as described below in more detail, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 allocates within the in-band network the necessary bandwidth to broadcast the first and second sets of IPG pages to the set-top terminals (STT) 108. If the first and second sets overlap, then only the non-redundant video
20 sequences need to be broadcast and so only enough bandwidth to broadcast the non-redundant video sequences needs to be allocated. Such a situation may happen, for example, when the current time period is within prime time.

In a fourth step 208, the IPG pages of the first and second sets are
broadcast to set-top terminals (STT) 108 within the broadcast range. The broadcast range
25 may comprise all terminals 108 downstream from the head-end 102 or local neighborhood equipment 104. Only the non-redundant content needs to be broadcast. The broadcast is performed within the allocated in-band bandwidth.

Figure 2B depicts a first push topology 250 for demand-casting IPG pages
in accordance with an embodiment of the present invention. The topology 250 relates to
30 the push method 200 of Fig. 2A. As shown in Fig. 2B, the IPG pages are transmitted from the head-end (HE) 102 or local neighborhood equipment (LNE) 104 downstream

within the illustrative communications network 100. As shown in Fig. 2B, the broadcast is pushed from the HE 102 or LNE 104 to the distribution nodes 106 and finally to the multitude of set-top terminals 108.

Figure 3A is a flow chart showing a second push method 300 for demand-casting IPG pages in accordance with an embodiment of the present invention. As described below, the method 300 includes three steps.

In a first step 302, an IPG page is selected to be narrowcast to a group of terminals 108. For example, the group of terminals may be a group comprising a high concentration of users with a particular ethnicity or special interest, and the IPG page selected may comprise programming targeted to that ethnic group or special interest group. As another example, the group of terminals may comprise terminals 108 in a school campus or business, and the IPG page selected may comprise class instruction or other targeted material. The group 352 may include terminals 108 in one geographic area or terminals 108 dispersed among different geographic areas but linked, for example, via a network group address.

In a second step 304, bandwidth to narrowcast the selected IPG pages is allocated in the distribution system for that purpose. For example, as described below in more detail, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 allocates within the in-band network the necessary bandwidth to narrowcast the selected IPG page to the group 352 of terminals 108. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then no additional bandwidth for a narrowcast need be allocated.

In a third step 306, the selected IPG page is narrowcast to the group of terminals 108. The narrowcast need only be received by terminals 108 within the group 352 and does not need to be received by other STTs 108. The narrowcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the group 352 of terminals 108. The narrowcast is performed within the allocated in-band bandwidth. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the narrowcast need not be performed.

Figure 3B depicts a second push topology 350 for demand-casting IPG pages in accordance with an embodiment of the present invention. The topology 350

relates to the push method 300 of Fig. 3A. As shown in Fig. 3B, the IPG page is transmitted from the head-end (HE) 102 or local neighborhood equipment (LNE) 104 downstream within the illustrative communications network 100. As shown in Fig. 3B, the narrowcast is pushed from the HE 102 or LNE 104 to one or more distribution nodes 106 and finally to the terminals 108 within the group 352.

Figure 4A is a flow chart showing a first pull method 400 for demand-casting IPG pages in accordance with an embodiment of the present invention. As described below, the method 400 includes three steps.

In a first step 402, a request for an IPG page is received from a STT 108.

10 The request is transmitted upstream from the STT 108 to the HE 102 or LNE 104 by way of the communications network 100. The upstream transmission may be done via an out-of-band network. Alternatively, the upstream transmission may be done via an in-band network. Such a request may comprise, for example, a look ahead request where a user wishes to view programming for a time period ahead of the current time period. For a

15 system where a set or sets of IPG pages are already being broadcast per Figs. 2A and 2B, the STT 108 may first check to see whether or not the requested IPG page is already being broadcast before transmitting the request upstream.

In a second step 404, bandwidth to pointcast the requested IPG page is allocated in the distribution system for that purpose. For example, as described in more

20 detail below, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 may allocate within the in-band network the necessary bandwidth to pointcast the requested IPG page to the requesting STT 108. Such allocation is performed if sufficient system resources are available to establish such a session. Moreover, if the requested IPG page is already being broadcast per Figs. 2A and

25 2B, then no additional bandwidth for a pointcast need be allocated.

In a third step 406, the requested IPG page is pointcast to the requesting set-top terminal (STT) 108. The pointcast need only be received by the requesting STT 108 and does not need to be received by other STTs 108. The pointcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the

30 requesting STT 108. The pointcast is performed within the allocated in-band bandwidth.

If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the pointcast need not be performed.

Figure 4B depicts a first pull topology 450 for demand-casting IPG pages in accordance with an embodiment of the present invention. The topology 450 relates to the pull method 400 of Fig. 4A. As shown in Fig. 4B, the request is transmitted upstream from the requesting STT 108 to the HE 102 or LNE 104 via illustrative communications network 100. Subsequently, the requested IPG page is pointcast downstream from the HE 102 or LNE 104 to the requesting STT 108 via the network 100.

Figure 5A is a flow chart showing a second pull method 500 for demand-casting IPG pages in accordance with an embodiment of the present invention. As described below, the method 500 includes three steps.

In a first step 502, a request for an IPG page is received from a requesting STT 552. The request is transmitted upstream from the requesting STT 552 to the HE 102 or LNE 104 by way of the communications network 100. The upstream transmission may be done via an out-of-band network. Alternatively, the upstream transmission may be done via an in-band network. Such a request may comprise, for example, a look ahead request where a user wishes to view available special interest programming for a time period ahead of the current time period. For a system where a set or sets of IPG pages are already being broadcast per Figs. 2A and 2B, the requesting STT 552 may first check to see whether or not the requested IPG page is already being broadcast before transmitting the request upstream.

In a second step 504, bandwidth to narrowcast the requested IPG page is allocated in the distribution system for that purpose. For example, as described below in relation to Figs. 7 and 8, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 may allocate within the in-band network the necessary bandwidth to narrowcast the requested IPG page to a group 554 of terminals which includes the requesting STT 552. Such allocation is performed if sufficient system resources are available to establish such a session. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then no additional bandwidth for a pointcast need be allocated. The group 554 may include terminals 108 in one geographic area or

terminals 108 dispersed among different geographic areas but linked, for example, via a network group address.

5 In a third step 506, the requested IPG page is narrowcast to the group 554 of terminals 108. The narrowcast need only be received by terminals 108 within the group 554 and does not need to be received by other STTs 108. The narrowcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the group 554 of terminals 108. The narrowcast is performed within the allocated in-band bandwidth. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the narrowcast need not be performed.

10 Figure 5B depicts a second pull topology 550 for demand-casting IPG pages in accordance with an embodiment of the present invention. The topology 550 relates to the pull method 500 of Fig. 5A. As shown in Fig. 5B, the request is transmitted upstream from the requesting STT 552 to the HE 102 or LNE 104 via illustrative communications network 100. Subsequently, the requested IPG page is narrowcast
15 downstream from the HE 102 or LNE 104 to the group 554 which includes the requesting STT 108 via the network 100.

Figure 6A is a flow chart showing a third pull method 600 for demand-casting of IPG pages in accordance with an embodiment of the present invention. As described below, the method 600 includes five steps.

20 In a first step 602, a request for an IPG page is received from a first STT 652. The request is transmitted upstream from the first STT 652 to the HE 102 or LNE 104 by way of the communications network 100. The upstream transmission may be done via an out-of-band network. Alternatively, the upstream transmission may be done via an in-band network. Such a request may comprise, for example, a look ahead request
25 where a user wishes to view programming for a time period ahead of the current time period. For a system where a set or sets of IPG pages are already being broadcast per Figs. 2A and 2B, the first STT 652 may first check to see whether or not the requested IPG page is already being broadcast before transmitting the request upstream.

30 In a second step 604, a stream 656 assigned to pointcast the requested IPG page may be allocated in the distribution system for that purpose. Such allocation is performed if sufficient system resources are available to establish such a session. For

example, as described below in more detail, a bandwidth manager (BWM) within a head-end 102 and/or local neighborhood equipment 104 may determine that sufficient resources are available to assign the stream 656 to pointcast the requested IPG page to the first STT 652. The stream assignment may be made, for example, by assigning a particular value to the program identifier (PID) for the stream 656. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the stream assignment need not be made.

In a third step 606, the requested IPG page is pointcast to the first STT 652 via the assigned stream 656. This may be done by transmitting packets that are identified by the particular PID value and contain the video sequence of the requested IPG page. The pointcast need only be received by the first STT 652 and does not need to be received by other STTs 108. The pointcast is sent downstream from the head-end 102 or local neighborhood equipment 104 to the first STT 652. If the requested IPG page is already being broadcast per Figs. 2A and 2B, then the pointcast need not be performed.

In a fourth step 608, a request for an IPG page is received from a second STT 654, where the IPG page requested is the same IPG page as the one requested by the first STT 652 in the first step 602. Like the first request, this second request is transmitted upstream from the second STT 654 to the HE 102 or LNE 104 by way of the communications network 100 via either an out-of-band network or via an in-band network. The second STT 654 may be either in the same geographic area as the first STT 652, or the second STT 654 may be in a different geographic area as the first STT 652.

Either way, in a fifth step 610, the identifier (e.g., PID value) for the stream 656 is transmitted from the HE 102 or LNE 104 to the second STT 654. This enables the next step 612 to occur without use of additional PIDs or additional network bandwidth.

Finally, in a sixth step 612, the second STT 654 receives the requested IPG page via the same stream 656 as that which delivers the IPG page to the first STT 652. This may be done, for example, by setting the second STT 654 to decode and present packets that are identified by the particular PID value for the stream 656. Such packets are the ones which contain the video sequence of the requested IPG page. In this manner,

“sharing” of the stream 656 occurs, changing the previously “single” pointcast to a “double” pointcast.

Similarly, additional terminals 108 may “share” the pointcast by requesting the same IPG page and receiving it via the same stream 656. In this way, any number of terminals 108 may share the pointcast. This results in more efficient use of limited bandwidth.

Figure 6B depicts a third pull topology 650 for demand-casting of IPG pages in accordance with an embodiment of the present invention. The topology 650 relates to the pointcast “sharing” method 600 of Fig. 6A. As shown in Fig. 6B, a request is transmitted upstream from the first STT 652 to the HE 102 or LNE 104 via illustrative communications network 100. In response, the requested IPG page is pointcast by way of a stream 656 from the HE 102 or LNE 104 to the first STT 652. Next, a second request for the same IPG page is transmitted upstream from the second STT 654 to the HE 102 or LNE 104 via the network 100. In response, the identifier for the stream 656 is transmitted from the HE 102 or LNE 104 to the second STT 654. Subsequently, the second STT 654 uses the identifier to receive the IPG page from that same stream 656.

Figure 6C is a flow chart showing a method 660 of terminating (or continuing) demand-casts in accordance with the third pull method 600. As described below, the method 660 includes five steps.

In a first step 662, an STT finishes viewing a stream which transmits an IPG page. In the example discussed above with respect to Figs. 6A and 6B, the STT may be either the first STT 652 or the second STT 654. In general, the STT may be any of multiple terminals which are sharing the stream, or the STT may be the last terminal to be viewing a stream which was previously shared.

In a second step 664, the HE 102 or LNE 104 is notified that the STT has finished viewing the stream. Such a notification occurs by the STT sending a communication upstream to the HE 102 or LNE 104 by way of an out-of-band or in-band network.

In a third step 666, a determination is made as to whether or not that stream is still being viewed by one or more STTs. As described in more detail below, this

determination is done within the HE 102 or LNE 104 and may be done by a bandwidth manager in conjunction with a session manager.

In a fourth step 668, if one or more STTs are still viewing that stream, then transmission of the stream by the HE 102 or LNE 104 continues. Such transmission is typically performed by an in-band delivery system.

Finally, in a fifth step 670, if no more STTs are still viewing that stream, then the stream is "torn down" so that it is no longer transmitted and no longer takes up network bandwidth. The torn down stream is made available for reassignment to reuse the bandwidth to transmit a different pointcast, narrowcast, or broadcast.

III. DEMAND-CAST SYSTEM

1. Guide Page Usage Frequency Distribution

Prerequisite assumptions need to be made regarding the usage frequency distribution of guide pages. Certain pages in the guide page matrix, such as those in the current time slot and adjacent time slots (near look-ahead) are likely to be accessed frequently by STT users. Similarly, other guide pages, as in the case of "far look-ahead" pages, are likely to be accessed less frequently. This characteristic, inherent in guide page usage, lends the IPG well to a demand-cast model described in this document. Access to all the guide pages in the guide page matrix can be made possible by sending in the transport a combination of constantly broadcast guide pages for those pages that are most frequently accessed, and temporarily broadcast or demand-cast guide pages for those less frequently accessed. The technique consists in sending current and near look-ahead pages in broadcast fashion and sending far look-ahead pages in demand-cast fashion.

2. Demand-cast Overview

A demand-cast IPG system is a two-way system requiring communication between STT users on the cable network and the head-end via a back-channel. Demand-cast pages are inserted in the transport stream for temporary broadcast based on access demand generated by STT users on the cable network. When a request for a guide page is

made by a particular STT, two things can happen. If the page is already in the IPG broadcast, the STT simply acquires the corresponding stream. If the page is not in the broadcast, the STT requests from the head-end that the corresponding stream be inserted in the IPG multiplex. The head-end replaces the least frequently accessed and not currently accessed stream in the IPG multiplex with the newly requested page. When a STT no longer accesses a guide page, it informs the head-end that it has released it. When accessing a demand-cast page, the IPG STT application also times-out following a certain delay of inactivity (i.e. 2 minutes) on the part of the user. In this case it also informs the head-end that it has released the page. Informing the head-end when demand-cast pages become released ensures that non-accessed demand-cast pages become available for substitution. When a STT requests that a new demand-cast page be inserted into the IPG multiplex, if there is no slot available in the IPG multiplex, the head-end refuses to insert a newly requested guide page resulting in a blockage. All statistical systems are susceptible to blockage if loaded with too many users or in the case of rare chaotic episodes. The advantage of the demand-cast model is that if a particular page is susceptible to intensive access, such as in the case of a page listing a major sports event, it only needs to be inserted once into the transport stream. It is readily accessible by multiple STTs without consuming additional bandwidth.

3. Latency in Broadcast vs. Demand-cast

Access to guide pages with low latency is an important feature in the IPG. Constantly broadcast pages offer the lowest latency access, whereas demand-cast pages may be delayed if not yet in the transport stream. Frequently accessed pages, such as those in the current time slot and near look-ahead time slots, and perhaps prime-time slots need to be broadcast constantly so as to remain accessible with the minimum of latency. Less frequently accessed far look-ahead pages can be demand-cast.

4. System Description

Figure 7 depicts a two-way system 700 for efficient delivery of demand-cast video sequences in accordance with an embodiment of the present invention. The system 700 includes a session manager (SM) 702 and a transport stream generator (TSG) 704.

Both the SM 702 and the TSG 704 may be, for example, co-located at a distribution center. The distribution center may comprise, for example, a headend 102 in the illustrative distribution system 100. Alternatively, the SM 702 and the TSG 704 may be at different locations. For example, the SM 702 may be at a headend 102, and the
5 TSG 704 may be at local neighborhood equipment 104 in the illustrative distribution system 100.

Both the SM 702 and the TSG 704 are coupled to a plurality of terminals 706 via a distribution network. The distribution network may comprise, for example, the cable distribution network 100 illustrated in Fig. 1. In that example, the terminals 706
10 would comprise set-top terminals 108 or the equivalent functionality integrated into a computer system or advanced television. Alternatively, for example, the distribution network may comprise a satellite communications system or another type of communications system (telephonic, wireless, etc.).

One terminal 706 and its links to the SM 702 and the TSG 704 are
15 illustrated in Fig. 10. In the particular embodiment shown in Fig. 10, the terminal 706 receives in-band communications from the TSG 704 and sends out-of-band (OOB) communications to the SM 702. In an alternative embodiment, the communications to the SM 702 may comprise upstream in-band communications.

The session manager (SM) 702 may comprise, in one embodiment, a
20 computer system residing at a cable headend 102. The computer system may comprise, for example, a computer server running a version of the UNIX (or alternatively Windows) operating system. The computer system may receive out-of-band communications from the terminals 706 by way of a connection to the network controller. For example, the connection may comprise an Ethernet connection, and the network controller may
25 comprise one from General Instruments (now part of Motorola) or another supplier. The computer system also communicates with and controls the transport stream generator 704 by way of a network connection such as an Ethernet connection.

The SM 702 manages delivery of the IPG to terminals 706 on multiple cable nodes each served by a separate IPG multiplexed transport stream generated at a
30 TSG 704. The SM 702 also monitors demand-cast stream usage by the terminals 706. It tracks IPG demand-cast streams that are acquired by at least one terminal 706 by

maintaining a dynamic list of terminals 706 using each stream. This is done for each IPG multiplexed transport stream managed by the SM 702. The SM 702 also accepts messages from terminals 706 indicating that they have acquired, released, or requested demand-cast streams. A terminal 706 that has acquired a demand-cast stream is
5 registered to the stream, and a terminal 706 that has released a demand-cast stream is removed from the registry for the stream. The SM 702 informs the corresponding TSG 704 once there is no longer any terminals 706 registered to a particular demand-cast stream. It also informs the TSG 704 when a terminal 706 requests a demand-cast stream. In one embodiment, the SM 702 may time-out acquisition of a stream by any terminal
10 706 if the terminal 706 has not released the stream within a period of time (for example, a few minutes). The time-out may be implemented by removing the particular terminal 706 from the registry for the stream.

The transport stream generator (TSG) 704 may comprise, in one embodiment, a computer system residing at a cable headend 102. The computer system
15 may comprise, for example, a computer server running a version of the Windows (or alternatively UNIX) operating system. Alternatively, the TSG 704 may be located separately from the SM 702, for example, at local neighborhood equipment 104. Each TSG 704 is coupled to a SM 702, for example, via an Ethernet network. The TSG 704 may generate one or more IPG multiplexed transport stream, each broadcast to a
20 respective node in the distribution system.

In one embodiment, the IPG multiplexed transport stream comprises a MPEG transport stream. In this case, the TSG 704 may communicate with the terminals 706 by way of tables in the private section of the MPEG transport stream. Such a table may include a list of available demand-cast streams, along with the address of the source
25 TSG 704 and information to identify the particular IPG multiplexed transport stream to which the table belongs.

The TSG 704 manages each IPG multiplexed transport stream which it generates. The TSG 704 receives information from the SM 702 indicating whether each demand-cast stream being served is currently being acquired by any terminal 706 or not.
30 In other words, the TSG 704 is informed by the SM 702 when there is no longer any terminals 706 acquiring a demand-cast stream.

0052220 2988560

In one embodiment, the TSG 704 maintains a status for each variable demand-cast stream being served. The status is adjusted upon receipt by the TSG 704 of certain messages from the SM 702. The basic states for the status comprise an "acquired" state which denotes that the demand-cast stream is in use by one or more terminals 706, and a "released" state which denotes that the demand-cast stream is not in use by any terminal 706. The TSG 704 keeps serving "acquired" demand-cast streams by multiplexing them into appropriate transport streams and replaces "released" demand-cast streams with new demand-cast streams upon receipt of a request message from the SM 702. In a preferred embodiment, the TSG 704 also keeps track of the order in which the streams are released, so that the oldest released stream may be used as the preferred candidate for replacement.

If all the demand-cast streams in a particular IPG multiplexed transport stream are "acquired," then a new stream cannot be inserted, and so the TSG 704 refuses the request. In such a case, a message indicating such a refusal may be sent to the SM 702 and/or the requesting terminal 706.

In one embodiment, the terminal 706 comprises a set-top terminal (STT) for use by a service subscriber. The STT may comprise an embedded system which includes a tuner, a demultiplexer, and a decoder. The STT drives the subscriber's display unit or TV set, and it may be connected to the TSG 704 by way of a RF feed from a cable distribution network. The IPG content may be received from a particular IPG multiplexed transport stream on a specific QAM carrier signal. In one embodiment, the IPG multiplexed transport stream may comprise an ensemble of elementary MPEG video streams, each representing a portion of the guide.

In a preferred embodiment, the terminal 706 includes IPG client software application which is resident at the terminal 706. The IPG client application is responsible for presenting the IPG to the subscriber. The IPG client application demultiplexes and decodes IPG pages requested by the user. If a requested page is already being received via the IPG multiplexed transport stream, then the IPG client application acquires the stream immediately and sends a message to the SM 702 that it has acquired the stream. If the requested page is not in the IPG multiplexed transport stream, then the IPG client application sends a request message to the SM 702. Subsequently, the IPG client application acquires the stream once it is received. In

addition, when a stream is no longer being acquired, the IPG client application sends a release message to the SM 702. In one embodiment, if there is no remote control or other activity by the user for a period of time (for example, a few minutes), then the IPG client application times-out the acquisition. The time-out may be accomplished, for example,
5 by sending a release message to the SM 702 and acquiring a broadcast stream instead.

5. Description Per Major Module

The demand-cast system consists of three major subsystems: the set top
10 terminal (STT); the session manager (SM); and the transport stream generator (TSG.) A description of each subsystem follows.

A. STT (Set-Top Terminal)

15 The set top terminal is the end-user or cable service subscriber tuner/demultiplexer/decoder and embedded system. Currently, the STT used in initial pilot deployments is the General Instruments DCT-2000. It is connected to the cable operator RF feed. It drives the subscribers display unit or TV set. The IPG content is in the IPG transport stream (or multiplex) located on a specific QAM carrier. The IPG
20 multiplex contains an ensemble of elementary MPEG video streams each representing portions of the guide. Some of these streams are guide grid pages. The STT receives messages from the head-end via tables in the private section of the IPG transport stream (in-band messaging.) The STT sends messages to the head-end via the out-of-band return path.

25

The IPG Application is the set top terminal resident program responsible for presenting the DIVA Interactive Program Guide to the subscriber. The IPG application demultiplexes and decodes IPG pages requested by the user. If a particular page is in the IPG transport stream, the STT acquires the stream immediately and informs
30 the SM that it has requested it. If the page is not in the multiplex, the STT also sends a message to the SM that it has requested it. Then it acquires the stream once it's in the multiplex. When the STT no longer is acquiring a guide stream, it informs the SM that it has released it.

If the STT is on a demand-cast stream for more than 2minutes without any remote control activity, it times-out. It acquires a broadcast stream instead and informs the SM that it has released the demand-cast stream.

5

B. SM (Session Manager)

The session manager is a computer residing at the cable head-end. Currently, the SM is a SPARC Station running Solaris. It is connected via Ethernet to the server side of the General Instruments network controller (NC) and is the receiver for OB
10 return path messages originating from STTs. The SM can handle STTs on multiple cable nodes each served by a separate IPG multiplex. The SM communicates and controls the TSGs via Ethernet. The TSGs generate the IPG transport streams.

The SM manages one or multiple cable networks and monitors demand-
15 cast stream usage. It tracks IPG demand-cast streams that are acquired by at least one STT maintaining a dynamic list of STTs that are using them. This is done for each multiplex managed by the SM. The SM accepts messages from STTs indicating that they have requested or released demand-cast streams. A STT that has acquired a demand-cast stream is registered to the stream and a STT that has released a demand-cast stream is
20 removed from the streams registry. The SM informs the TSG once there are no longer any STTs on a particular demand-cast stream. It also informs the TSG when a STT requests a demand-cast stream.

The SM times-out any STT from a demand-cast stream if the box has not
25 released the stream within a few minutes. It does this by removing it from the demand-cast stream's registry.

C. TSG (Transport Stream Generator)

30

The transport stream generator is a computer residing at the cable head-end. Currently, the TSG is a PCI WinNT system. It is connected via Ethernet to the SM controlling it. The TSG produces one or more IPG transport streams each broadcast to their respective nodes. The TSG communicates with the STTs by way of tables in the private section of the IPG transport streams. The table contains the list of available

demand-cast streams along with the IP address of the source TSG (its IP address) and the channel number of the IPG multiplex. (which multiplex it is in the TSG)

The TSG manages the transport stream for each IPG multiplex it generates.

- 5 It receives information from the SM on each demand-cast stream indicating whether the stream is currently acquired by any STT or released by all STTs. The TSG is informed by the SM when there is no longer any STT on a demand-cast stream. The TSG is informed by the SM when a STT requests a demand-cast stream. The TSG maintains status for all the demand-cast streams in each multiplex. It adjusts the status for each
- 10 stream for which it receives a message from the SM. The basic status is 'acquired' for streams in use by one or more STTs or 'released' for streams that are not in use by any STT. The TSG keeps 'acquired' streams in its multiplexes and replaces 'released' streams with new demand-cast streams upon request. It also keeps track of which are the few oldest 'released' stream. The best candidate for replacement is always the oldest
- 15 'released' stream. If all the demand-cast streams in a multiplex are 'acquired' then a new stream can not be inserted and the TSG refuses the request.

V. EXAMPLE OF INTERACTIVE PROGRAM GUIDE

- An embodiment of an interactive program guide in accordance with the present invention is described below. The embodiment is described for purposes of
- 20 illustration and is not meant to limit the scope of the present invention.

- Figure 8 depicts an example of a set of IPG pages for constant broadcast and other IPG pages for variable demand-cast in accordance with a preferred embodiment of the present invention. In the example shown in Fig. 8, 40 IPG pages are constantly broadcast and up to 30 IPG pages may be variably demand-cast. There are 10 guide
- 25 pages per time slot, and the constant broadcast includes 10 guide pages for the current timeslot and 30 guide pages for the next three hourly timeslots. The variably demand-cast pages may be any pages within the guide page matrix that are not currently being broadcast.

- In such a system, when a request for a guide page is made by a particular
- 30 terminal, either of two scenarios can occur. First, if the page is already in the IPG broadcast, then the terminal simply acquires the stream with the page from the broadcast.

Second, if the page is not in the broadcast, then the terminal transmits a request for the page to the head-end. The head-end may then fulfill the request by replacing the least frequently accessed and not currently accessed stream being transmitted downstream with a stream containing the requested page.

5 Subsequently, the terminal will end its access of the guide page. This may occur because the user has instructed the terminal to view a different page. Alternatively, this may occur because of a time-out due to inactivity over a period of time (for example, 2 minutes). In any case, when the terminal is no longer accessing the guide page, then the terminal transmits a message to the head-end which indicates that the terminal has
10 released the corresponding stream. Informing the head-end when variably demand-cast pages become released ensures that non-accessed demand-cast pages become available for substitution as described above.

One advantage of the preferred embodiment of the present invention is that, if a particular page is intensively accessed (such as a page listing a major sports
15 event), then the system needs to insert the particular page only once into the transport stream. Once inserted, the page is readily accessible by multiple terminals without consuming additional bandwidth. Other systems would be more susceptible to blockage. Blockage would occur, for example, when a newly requested page cannot be inserted into the transport stream because there is no available bandwidth within the transport stream.

20 An IPG delivery system in accordance with a preferred embodiment of the present invention is a two-way system which is capable of two-way communications between set top terminals on the cable network and the equipment in the cable head-end. For example, communications may be transmitted from the terminals to the head-end via a back-channel, and content may be transmitted from the head-end to the terminals by
25 insertion into a transport stream.

Figure 9 depicts an example of one frame taken from a video sequence of an IPG page in accordance with the present invention. The IPG page 900 of Figure 9 comprises a first 905A, second 905B and third 905C time slot objects, a plurality of channel content objects 910-1 through 910-8, a pair of channel indicator icons 941A,
30 941B, a video barker 920 (and associated audio barker), a cable system or provider logo 915, a program description region 950, a day of the week identification object 931, a time

of day object 939, a next time slot icon 934, a temporal increment/decrement object 932, a "favorites" filter object 935, a "movies" filter object 936, a "kids" (i.e., juvenile) programming filter icon 937, a "sports" programming filter object 938 and a VOD programming icon 933. It should be noted that the day of the week object 931 and next
5 time slot icon 934 may comprise independent objects (as depicted in Figure 9) or may be considered together as parts of a combined object.

In a system, illustratively, comprising 80 channels of information, the channels are displayed in 8-channel groups having associated with them three hour time slots. In this organization, it is necessary to provide 10 video PIDs to carry the present-
10 time channel/time/title information, one or more audio PID to carry the audio barker and/or one or more data PID (or other data transport method) to carry the program description data, overlay data and the like. To fully broadcast interactive program information up to 24 hours in advance, it is necessary to provide 160 ($10 \times 24 / 1.5$) video PIDS, along with one or more audio and, optionally, one or more data PIDs. The amount
15 of time provided for in broadcast video PIDs for the given channel groups comprises the time depth of the program guide, while the number of channels available through the guide (compared to the number of channels in the system) provides the channel depth of the program guide. In a system providing only half of the available channels via broadcast video PIDs, the channel depth is said to be 50%. In a system providing 12
20 hours of time slot "look-ahead," the time depth is said to be 12 hours. In a system providing 16 hours of time slot "look-ahead" and 4 hours of time slot "look-back," the time depth is said to be +16/-4 hours.

The video streams representing the IPG are carried in a single transport stream or multiple transport streams, within the form of a single or multi-programs as
25 discussed previously in this invention. A user desiring to view the next 1.5 hour time interval (e.g., 9:30 – 11:00) may activate a "scroll right" object (or move the joystick to the right when a program within program grid 902 occupies the final displayed time interval). Such activation results in the controller of the STT noting that a new time interval is desired. The video stream corresponding to the new time interval is then
30 decoded and displayed. If the corresponding video stream is within the same transport stream (i.e., a new PID), then the stream is immediately decoded and presented. If the corresponding video stream is within a different transport stream, then the related

transport stream is extracted from the broadcast stream and the related video stream is decoded and presented. If the corresponding transport stream is within a different broadcast stream, then the related broadcast stream is tuned, the corresponding transport stream is extracted, and the desired video stream is decoded and presented.

5 A user interaction resulting in a prior time interval or a different set of channels results in the retrieval and presentation of a related video stream. If the related video stream is not part of the broadcast video streams, then a pointcast session, for example, may be initiated as described above in relation to Figs. 4A and 4B. For this purpose, the STT sends a request to the head end via the back channel requesting a
10 particular stream. The head end then processes the request, retrieves the related stream from the information server, incorporates the stream within a transport stream as a video PID (preferably, the transport stream currently being tuned/selected by the STT) and informs the STT which PID should be received, and from which transport stream it should be demultiplexed. The STT then retrieves the related video PID. In the case of
15 the video PID being within a different transport stream, the STT first demultiplexes the corresponding transport stream (possibly tuning a different QAM stream within the forward channel).

Normally, upon completion of the viewing of the desired stream, the STT indicates to the head end that it no longer needs the stream, whereupon the head end tears
20 down the pointcast session. The viewer is then returned to the broadcast stream from which the pointcast session was launched. However, as described above in relation to Figs. 6A, 6B, and 6C, the method for "sharing" pointcasts may avoid the need to tear down the pointcast session if another STT is still utilizing the pointcast. In addition, the above described pointcast sharing technique more efficiently utilizes the network
25 bandwidth allocated to pointcasts.

Now consider the difference in latencies between push demand-casts and pull demand-casts. Access to IPG pages with low latency is a desirable feature in providing a program guide. A system which only pushes IPG pages would offer potentially the lowest latency access, whereas a system which only pulls pages would
30 incur significant delays in accessing each page.

006220" 2988550

In accordance with a preferred embodiment of the present invention, frequently accessed IPG pages such as those in the current time slot and near look-ahead time slots, and perhaps prime-time slots would be push demand-cast constantly so as to remain accessible with low latency. Less frequently accessed far look-ahead pages would be pull demand-cast.

VI. EXAMPLE IMPLEMENTATIONAL ARCHITECTURES

The first through fourth (1000 through 1300) implementational architectures described below are illustrative implementational architectures which may be used to implement the present invention. They are not meant to limit the present invention to those specific embodiments.

Figure 1000 depicts a first implementational architecture 1000 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention. The first implementational architecture 1000 includes a key manager 1002, a subscription/billing manager 1004, an IPG generator 1006, and a head-end 102. This first architecture 1000 provides for encryption of the IPG content.

The head-end 102 is coupled to a multitude of STTs 108 by way of both an in-band network and an out-of-band (OOB) network. The head-end 102 includes various components which are coupled together and interact with each other. The head-end 102 illustrated includes an advertising/html content source 1008, an IPG content source 1009, a compositor 1010, an encoder 1012, a processor 1014, a multiplexor 1016, an encryptor 1018, an in-band delivery system 1020, a controller 1022, a session manager 1024, an access manager 1026, a bandwidth manager 1028, and out-of-band (OOB) equipment 1030.

Note that the session manager 702 of Fig. 7 encompasses the functionality of multiple components of Fig. 10, including the session manager 1024 and the bandwidth manager 1028. Also, note that the transport stream generator 704 of Fig. 7 encompasses the functionality of multiple components of Fig. 10, including the processor 1014 and the mux 1016.

Figure 11 depicts a second implementational architecture 1100 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention. The second implementational architecture 1100 includes the components of the first implementational architecture 1000. In addition, the
5 second implementational architecture 1100 includes local neighborhood equipment 104 and a video-on-demand (VOD) server 1102. This second architecture 1100 provides for encryption of the IPG content.

The LNE 104 is coupled to the HE 102 by way of an in-band network and an OOB messaging system. The LNE 104 is also coupled to a multitude of STTs 108 by
10 way of a local in-band network. The LNE 104 includes various components which are coupled together and interact with each other. The type of components in the LNE 104 are typically a subset of the type of components in the HE 102. The LNE 104 illustrated includes a processor 1114, a multiplexor 1116, an encryptor 1118, a local delivery system 1120, a controller 1122, a session manager (SM) 1124, an access manager (AM) 1126,
15 and a bandwidth manager (BWM) 1128.

Figure 12 depicts a third implementational architecture 1200 for managing delivery of video sequences of an interactive program guide in accordance with an embodiment of the present invention. The implementational architecture 1200 includes a
20 local IPG center 1202, a headend 1204, a service center 1206, and a plurality of set-top terminals (STT) 1208. In addition, the system may be integrated with a video on-demand (VOD) system 1210 and a corresponding VOD application 1238 at the STT 1208. This third architecture 1200 does not provide for encryption of the IPG content.

The local IPG center 1202 generates guide page user interface (UI) screens and periodically sends the UI screens to an IPG server 1212 at the headend 1204.
25 MSO/third party IPG add-on content 1214 may be provided to the IPG server 1212 from MSO equipment within the headend 1204. For example, the add-on content may include real-time advertisement video or HTML pages for electronic commerce.

The IPG server 1212 composes (C), encodes (E), processes (P), multiplexes (M), and modulates (QAM) the IPG content (guide plus add-on content) and
30 transmits it to a combiner 1216. The combiner 1216 combines the IPG content with broadcast TV, premium content (e.g., HBO), pay-per-view (PPV), and other content from

a multiple service operator (MSO) content delivery system 1218. The combined content is then broadcast to the STTs 1208 via an in-band distribution network 1220.

Upon viewer tuning of the STT 1208 to the IPG channel, an IPG application 1222 at the STT 1208 processes the IPG stream and provides the IPG via an application programming interface (API) 1224 to a "native" application 1226 running on the STT 1208. The native application 1226 decodes and presents the IPG to the viewer.

In one embodiment, the TV program guide for a current time period (1.5 hours) is broadcast to viewers. In addition, two weeks of lookahead TV programming may be delivered to viewers on demand via demand-cast. Upon a view action of moving a cursor to a lookahead time interval, the STT 1208 sends a request via a backchannel to a session manager (SM) 1228 [for example, via an OOB channel to a reverse path demodulator (RPD), then to a network controller (NC), then to the SM 1228]. The SM 1228 then causes the IPG server 1212 to multiplex the requested IPG page into the IPG stream.

The SM 1228 also interacts with a subscription/billing interface 1230 in the VOD system 1210 to coordinate access to VOD services from a link in the IPG user interface (UI). The UI also provides for access to premium content and pay-per-view purchasing by interacting through a two-way interface to a MSO customer management system (CMS) 1232 and digital access controller (DAC) 1234 in the service center 1206. The DAC 1234 generates digital encryption-related keys.

The implementational architecture 1200 also includes a bandwidth manager (BWM) 1236. As described above, the BWM 1236 provides techniques for more efficient utilization of the finite bandwidth available for distribution of the IPG.

Note that the session manager 702 of Fig. 7 encompasses the functionality of multiple components of Fig. 12, including the session manager 1228 and the bandwidth manager 1236. Also, note that the transport stream generator 704 of Fig. 7 encompasses the functionality of multiple components of Fig. 12, including the processor (P) and the multiplexer (M).

Figure 13 depicts a fourth implementational architecture 1300 for managing delivery of video sequences of an interactive program guide in accordance with

an embodiment of the present invention. The implementational architecture 1300 of Fig. 13 has many similarities to the implementational architecture 1200 of Fig. 12. This fourth architecture 1300 does not provide for encryption of the IPG content.

The fourth implementational architecture 1300 differs from the third
5 implementational architecture 1200 primarily in that some of the equipment is distributed from the headend 1204 to a plurality of hubs 1302 in the distribution system. In particular, the combiner 1216 is moved from the headend 1204 to each of the hubs 1302. In addition, the processor (P), multiplexer (M), and modulator (QAM) are moved from the headend 1204 to each of the hubs 1302. Thus, the functionality of the TSG 704 is
10 transferred to the hubs 1302.

VII. MESSAGING PROTOCOL

Returning attention to the system 700 of Fig. 7, the following describes a messaging protocol for communicating between the major components of the system 700. The messaging protocol is described in relation to Figs. 14-17. Although a specific
15 messaging protocol is described below, the present invention is not meant to be limited to that specific protocol.

First, the "source" transport stream generator (TSG) 704 communicates to a terminal 706 via, for example, a one-way in-band channel. The communication may be, for example, in the form of a "demand-cast index table" within a private section of the
20 IPG MPEG transport stream. Fig. 14 depicts an embodiment for the content of the demand-cast index table. The content may include: (a) a table version number (which increments when the table content changes); (b) a list of available demand-cast streams; (c) an internet protocol (IP) address for the source TSG; (d) a MUX channel number within the source TSG, and (e) a time of day and day of week.

Second, the terminal 706 communicates with the session manager (SM)
25 702 via, for example, a one-way out-of-band return path. The return path may be implemented, for example, using a user datagram protocol/internet protocol (UDP/IP) service to connect the terminal 706 to a network controller (NC) at the SM 702. Fig. 15 depicts one embodiment for the contents of the messages sent from the terminal 706 to
30 the SM 702. The message content as shown includes: (a) a demand-cast stream identification; (b) the terminal's identification; (c) the IP address of the source TSG; (d)

the MUX channel number within the source TSG; and (e) the message information itself. The message information may indicate: (1) an acquisition of the demand-cast stream by the terminal 706; (2) a release of the demand-cast stream by the terminal 706; or (3) a request for the demand-cast stream by the terminal 706.

5 Third, the SM 702 communicates with the source TSG 704 via, for example, a two-way communications channel. The two-way communications channel may comprise, for example, a TCP/IP connection over an Ethernet network. Fig. 16 depicts one embodiment for the contents of the messages sent from the SM 702 to the TSG 704. The message content as shown includes: (a) the demand-cast stream
10 identification; (b) the MUX channel number within the source TSG; and (c) a message/command from a set of messages/commands. The set of messages/commands include: (1) demand-cast stream released (no longer acquired by any terminal); (2) demand-cast stream requested; and (3) a reset command.

15 Messages from the SM 702 to the TSG 704 may be acknowledged by the TSG 704. Fig. 17 depicts one embodiment for the contents of the acknowledgement messages sent by the TSG 704 back to the SM 702. An acknowledgement message as shown includes: (a) the demand-cast stream ID; (b) the MUX channel number; (c) the TSG's address; and (d) the acknowledgement itself. The acknowledgement may convey acknowledgement of: (1) release of the demand-cast stream; (2) request for the demand-
20 cast stream; or (3) reset of the TSG 704.

VIII. STREAM STATUS AND CONVERSIONS OF STATUS

The following relate to stream status and conversions of status in accordance with a preferred embodiment of the present invention. Although a specific embodiment of stream status and conversions of status is described below, the present
25 invention is not meant to be limited to that specific embodiment.

1. Stream Status Within IGP Multiplex

The TSG 704 models bandwidth usage for each IGP multiplexed transport stream that it is managing. Each demand-cast stream within each transport stream may be either active or inactive. Active streams are currently being multiplexed into the transport
30 stream. Inactive streams are not currently being multiplexed into the transport stream.

Figure 18 depicts an example showing statuses of active demand-cast streams in an IPG multiplex within a TSG 704. For each demand-cast stream, TSG assigns status with respect to the streams intended multiplex. Demand-cast stream status, in context of the TSG, are:

5 1) 'active' streams are in the IPG multiplex

1.1) 'acquired' demand-cast streams are in the multiplex and are used by at least one STT. They are referenced in the demand-cast index table in the private section of the IPG transport stream. They are not candidates for removal.

10 1.2) 'released' demand-cast streams are in the multiplex and are not used by any STT. They are referenced in the demand-cast index table. They can become 'passive.'

1.2.1) 'passive' demand-cast streams are also technically 'released'.

15 They are in the multiplex and are not used by any STT. They are not referenced in the demand-cast index table. They are typically a small fraction of the 'released' demand-cast streams. The oldest few 'released' demand-cast streams are forced to 'inactive' status by a maintenance thread. They are candidates for removal.

20 2) 'inactive' demand-cast streams are not in the IPG multiplex. They are not referenced in the demand-cast index table. They may be inserted in the multiplex.

Note that the TSG may remove all the 'passive' demand-cast streams from their respective IPG multiplexes and replace them with null packets. It is however advantageous to leave 'passive' demand-cast streams in the multiplex because if a STT attempts to acquire it, latency will be minimized.

25 2. **Conversions of Status**

The TSG receives messages from the SM. Messages received from the SM are:

1) "request demand-cast stream"

2) "release demand-cast stream" The "release demand-cast stream" message includes the maximum number of STTs that were registered to the demand-cast stream.

3) "reset"

5 1) TSG Request Demand-cast Stream

a) If the TSG receives a "request demand-cast stream" message from the SM, then the following scenarios for activating the stream are possible. Figure 19 illustrates the various scenarios for activation of a demand-cast stream.

i) If the demand-cast stream is currently 'inactive', then

10 In a first case, if there is a 'passive' demand-cast stream in the corresponding multiplex, then the TSG removes an 'passive' demand-cast stream from its corresponding multiplex, thereby making it 'passive' and replaces it with the new requested demand-cast stream. The TSG adds reference to the new 'active' demand-cast stream in the demand-cast index
15 table. The TSG assigns the status 'active' to the newly inserted demand-cast stream. The TSG acknowledges SM for the "request demand-cast stream" message by sending a "success" message back to the SM.

20 In a second case, if there are no 'passive' demand-cast streams in the corresponding multiplex, but there is a 'released' demand-cast stream therein, then the TSG forces the oldest 'released' demand-cast stream to 'inactive' status and then follows the steps described directly above.

25 Finally, in a third case, if the TSG finds no 'passive' or 'released' demand-cast stream in the corresponding multiplex, it can not fulfill the request. It acknowledges the SM for the "request demand-cast stream" message by sending a "fail" message back to the SM.

ii) If the demand-cast stream is currently 'released' or 'passive', then

The TSG changes the status of the 'released' or 'passive' demand-cast stream to 'acquired.' It acknowledges the SM for the "request demand-cast stream" message by sending a "success" message back to the SM.

2) TSG Release Demand-cast Stream

- 5 If the TSG receives a "release demand-cast stream" message from the SM, then the TSG acknowledges the SM by sending a "success" message. If the demand-cast stream is currently 'acquired', then the TSG changes the status of the stream to 'released.'

3) Released Stream to Passive Stream Conversion

- 10 Removal of a 'released' demand-cast streams could be done, however, such removal would be disadvantageous. Initially, the reference to the 'released' demand-cast stream would have to be removed from the "demand-cast index table", then a few seconds later, the stream could be physically removed from the multiplex. This delay between removal from the table and from the multiplex is necessary to prevent a race condition where a STT is acquiring a demand-cast stream while the TSG is in the process of removing it. Therefore, only 'passive' streams are removed in accordance with a preferred embodiment of the present invention.
- 15

- The ratio of 'passive' to 'released' demand-cast may be specified in the TSG configuration file. It may be maintained as a percentage (i.e. 10% of 'released' streams are converted to 'passive') or it can be maintained as an absolute number (i.e. so as to ensure that there are usually two or three 'inactive' demand-cast streams).
- 20

- Figure 20 illustrates an overall process by which a released stream may be converted to a passive stream. Methods for determining which released streams are converted to passive streams include: an aging method and a statistical method. In the aging method, the oldest few 'released' demand-cast streams are constantly converted to 'passive' status by a maintenance thread. In the statistical method, the "release demand-cast stream" messages include statistical data regarding the demand-cast stream. This data is the maximum number of STTs that were on a released stream before it was released. The TSG converts those demand-cast streams that have had the least amount of users to 'passive' status.
- 25

VIII. OTHER TECHNICAL ASPECTS

The following are further technical aspects in accordance with a preferred embodiment of the present invention. Although a specific embodiment of those aspects is described below, the present invention is not meant to be limited to that specific
5 embodiment.

1. Initial Conditions

A. STT

When the STT launches the IPG application, it tunes to the QAM carrying the IPG transport stream. When the STT requests its first demand-cast stream it opens the
10 IPG channel with the SM. When the QAM is tuned, the STT acquires the demand-cast index table and sends an Init command to SM.

B. SM

Initially the SM knows nothing about the IPG multiplex fed to its client STTs. Upon receiving a first "request demand-cast stream" message from a STT, it
15 verifies that it is aware of the mux ID. Mux ID includes TSG IP address and mux channel within the TSG. If it is aware, then nothing happens. If it is not aware, the TSG opens a communication socket with the source TSG. The SM maintains a log where it registers all muxes that it controls. For each mux in the log, the TSG IP address and mux channel number is recorded.

20

C. TSG

Initially, the TSG is configured through its own configuration file. Configuration includes the number of demand-cast streams that can be supported by each IPG mux. The absolute number of 'passive' streams or the ratio of 'passive' streams to 'released' streams is specified in the configuration file.

2. Reset

A. SM

If the SM is down, upon reset, it looks-up TSG log file and sends a reset command to the TSG.

B. TSG

When TSG receives a "reset" command from the SM, it removes reference to all demand-cast streams in the demand-cast index table in the multiplex referenced by the mux ID in the reset command. Then a few second later, the TSG removes all the demand-cast streams within the multiplex.

C. STT

When the STT does not "see" the PID of the demand-cast stream it is acquiring in the demand-cast index table, it acquires a default IPG broadcast PID. If the STT does not see the demand-cast index table, the STT exits the IPG application.

3. Scalability

A. TSG

Each TSG can manage more than one IPG multiplex. IPG multiplex is referred to by the IPG address of the host TSG and the mux channel number on the TSG.

B. SM

SM can manage more than one TSG. Each IPG multiplex is referred to by the IPG address of the host TSG and the mux channel number on the TSG.

C. STT

STT messages regarding demand-cast streams include demand-cast stream ID, TSG IP address and the mux channel number on the TSG.

While specific embodiments and applications of the present invention have been illustrated and described, it is to be understood that the invention is not limited to the

precise configuration and components disclosed herein and that various modifications and variations which will be apparent to those skilled in the art may be made in the arrangement, operation, and details of the method and apparatus of the present invention disclosed herein without departing from the spirit and scope of the invention as defined in the following claims.

5

WHAT IS CLAIMED IS:

1 1. A system for providing access to array of guide pages from an
2 interactive program guide within constraints imposed by limited bandwidth available in a
3 distribution network, the system comprising:

4 a distribution control center coupled to the distribution network;
5 a session manager in the distribution control center for monitoring and
6 controlling usage of demand-cast stream bandwidth within the distribution network; and
7 a transport stream generator for receiving demand-cast stream usage
8 information from the session manager and using said information to control which
9 demand-cast streams are multiplexed into a transport stream for transmission to a
10 plurality of terminals via the distribution network.

1 2. The system of claim 1, wherein the plurality of terminals are
2 coupled to a node within the distribution network, and said transport stream is transmitted
3 from the transport stream generator to said node.

1 3. The system of claim 1, wherein the session manager receives
2 demand-cast stream acquisition, release, and request messages from the plurality of
3 terminals.

1 4. The system of claim 3, wherein said acquisition, release, and
2 request messages are transmitted via out-of-band communications.

1 5. The system of claim 1, wherein the transport stream includes a list
2 of available demand-cast streams, and said list is used by a terminal in determining
3 whether a stream with a particular guide page may be acquired immediately or needs to
4 be requested.

1 6. The system of claim 5, wherein an acquisition message is sent from
2 the terminal to the session manager if the stream is acquired, and a request message is
3 sent from the terminal to the session manager if the stream needs to be requested.

1 7. The system of claim 6, wherein a release message is sent from the
2 terminal to the session manager once the terminal is no longer acquiring the stream.

1 8. The system of claim 1, wherein the session manager tracks
2 demand-cast streams that are acquired by at least one terminal by maintaining a dynamic
3 list of terminals that are presently acquiring each demand-cast stream.

1 9. The system of claim 8, wherein the session manager informs the
2 transport stream generator when a terminal request a demand-cast stream which is not
3 present in the transport stream.

1 10. The system of claim 9, wherein the session manager informs the
2 transport stream generator when there is no longer any terminals acquiring the demand-
3 cast stream.

1 11. The system of claim 1, wherein the distribution control center
2 comprises a cable headend.

1 12. The system of claim 1, wherein the transport stream generator is
2 co-located with the session manager at the distribution control center.

1 13. The system of claim 1, wherein the transport stream generator is
2 located separately from the session manager.

1 14. A session manager for monitoring and controlling usage of
2 demand-cast bandwidth within a distribution network, the session manager comprising:
3 a monitoring module for receiving acquisition, release, and request
4 messages from a plurality of terminals;
5 a tracking module for maintaining a dynamic list of terminals that are
6 presently acquiring each demand-cast stream; and
7 a controlling module for informing the transport stream generator when a
8 terminal requests a demand-cast stream which is not present in the transport stream and
9 for informing the transport stream generator when there is no longer any terminals
10 acquiring the demand-cast stream.

1 15. A transport stream generator, said stream generator comprising:
2 an interface to a session manager for receiving demand-cast stream usage
3 information from the session manager;

- 4 a multiplexer for multiplexing demand-cast streams into a transport stream
5 for transmission to a plurality of terminals via a distribution network; and
6 a controller for controlling which demand-cast streams are multiplexed
7 into the transport stream using the demand-cast stream usage information.

DEMAND-CAST SYSTEM AND BANDWIDTH MANAGEMENT FOR DELIVERY OF INTERACTIVE PROGRAMMING

ABSTRACT OF THE DISCLOSURE

5 A system for more efficient utilization of the finite bandwidth available for
distribution of interactive program guide (IPG) video sequences. The system utilizes a
session manager and a transport stream generator to enable a set top terminal to access an
entire array of guide pages from the IPG within the constraints imposed by the limited
bandwidth available in the distribution network.

10 One embodiment of the present invention comprises a system that includes a
session manager (SM) and a transport stream generator (TSG) within a distribution control
center. The SM monitors and controls usage of demand-cast stream bandwidth within the
distribution network. The TSG receives information from the SM on each demand-cast
stream. The information includes which set top terminals, if any, are currently acquiring the
stream. The TSG uses the information to control the demand-cast streams multiplexed into
15 the transport stream for distribution to the set top terminals.

PA 3058165 v1



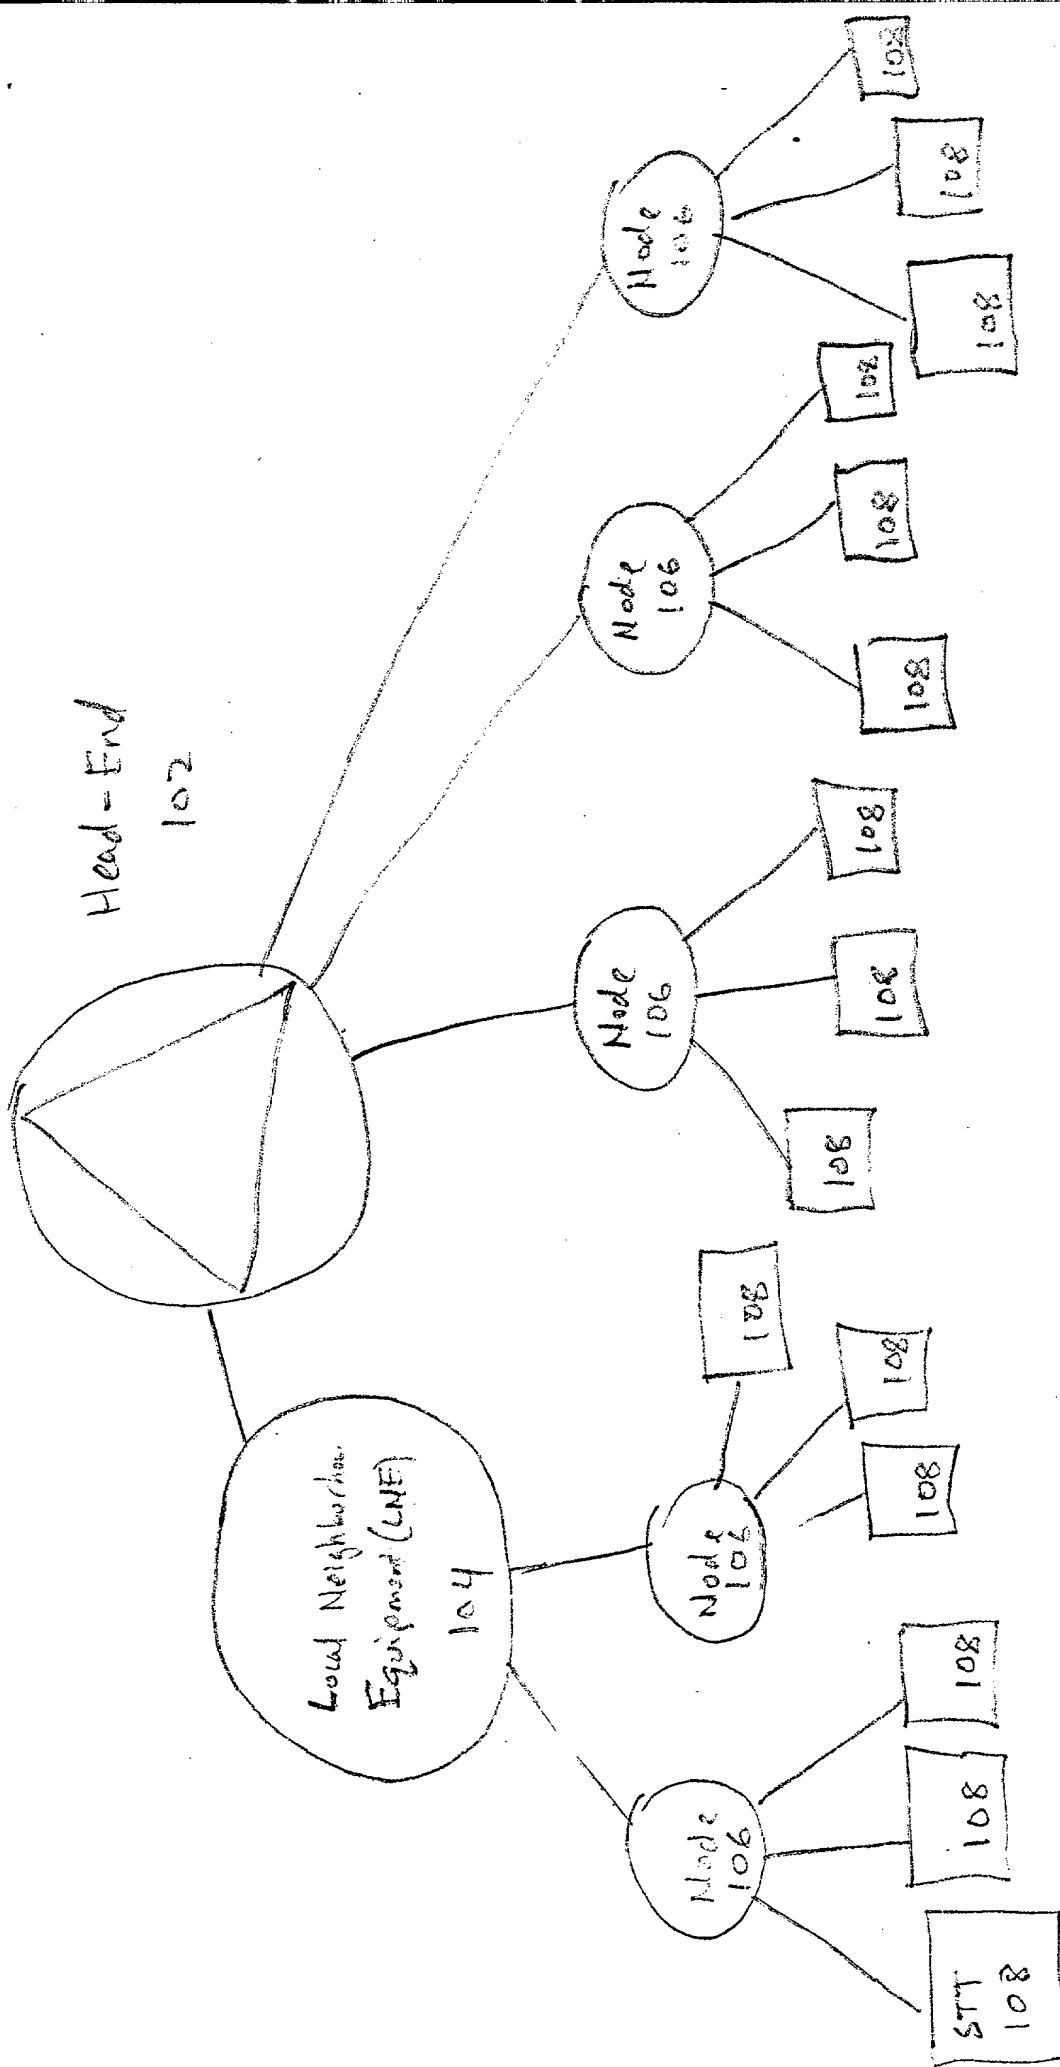


Fig. 1 100

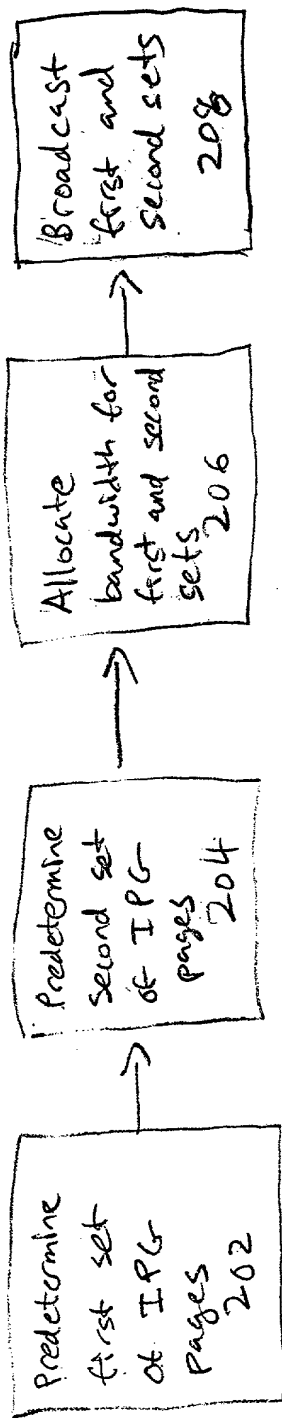


First Push Demandcast (Broadcast) method

Fig. 2A

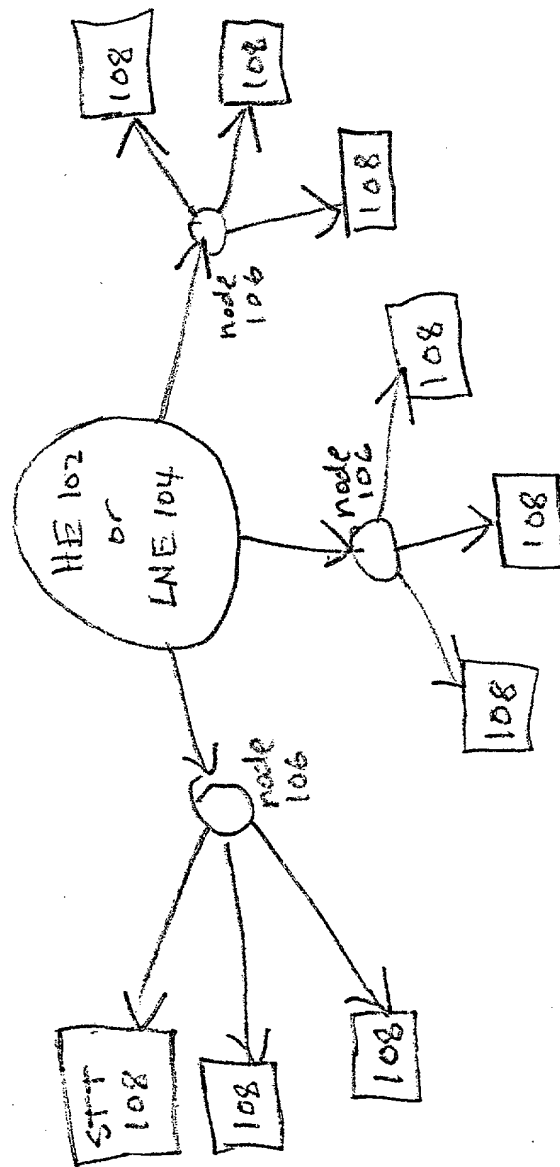


First Push Demand Cast (Broadcast) Topology

Fig. 2B

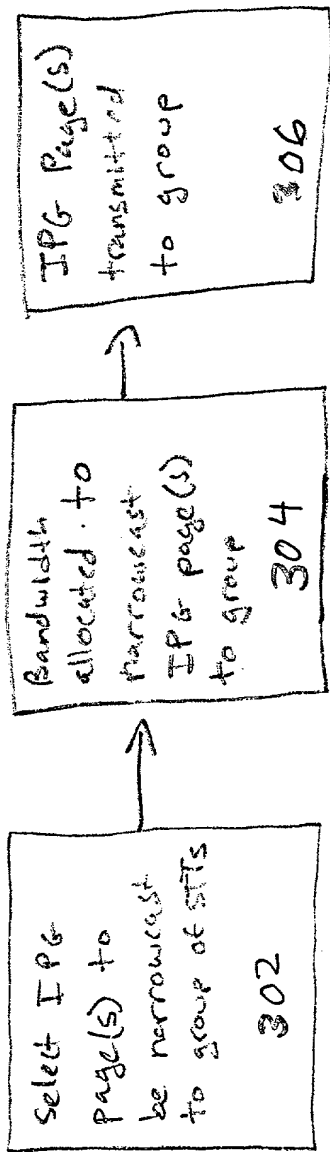


Second Push Demandcast (Narrowcast) method 300

Fig. 3A

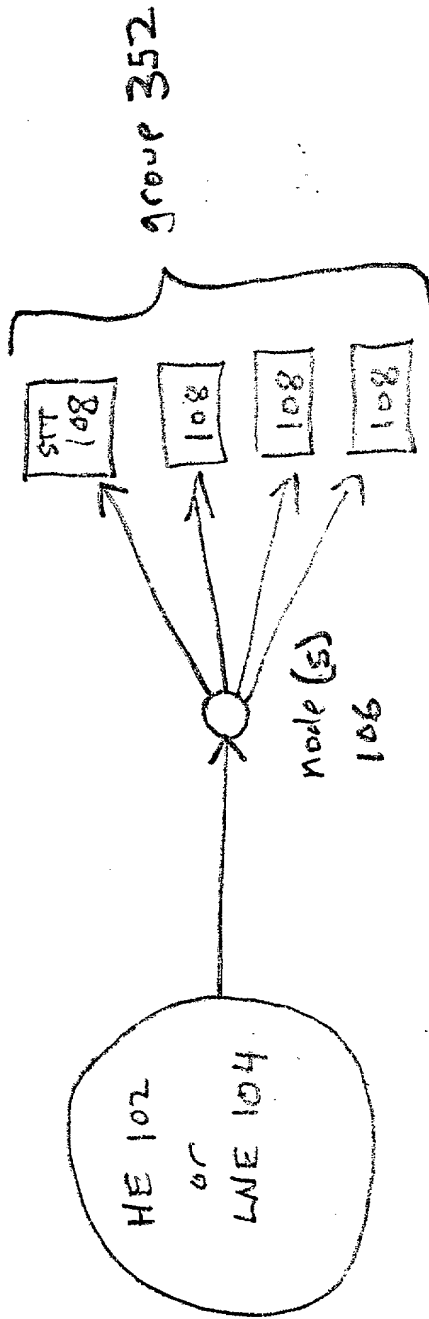

Second Push Demandcast (Narrowcast) Topology 350


Fig. 3B

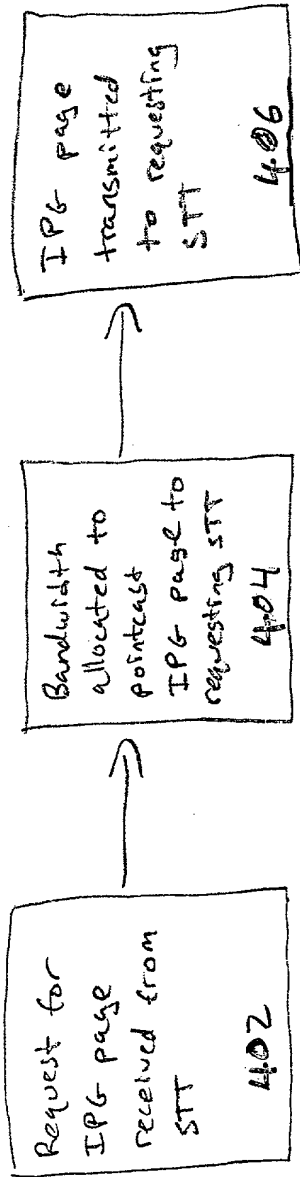

First Pull Demandcast (pointcast) method

400


Fig. 4A

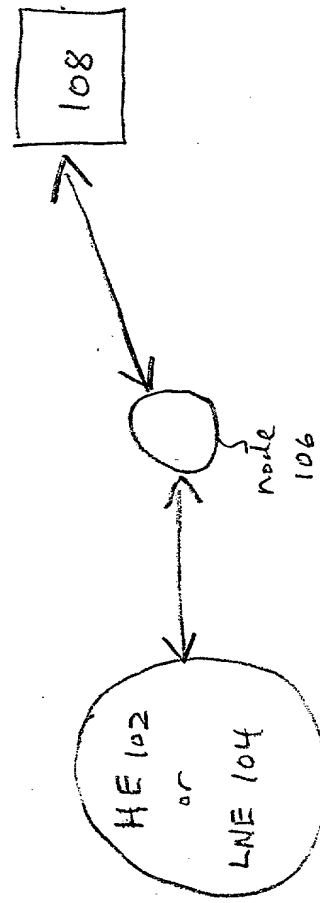

Pull Demandcast (pointcast) Topology


450

Fig. 4B

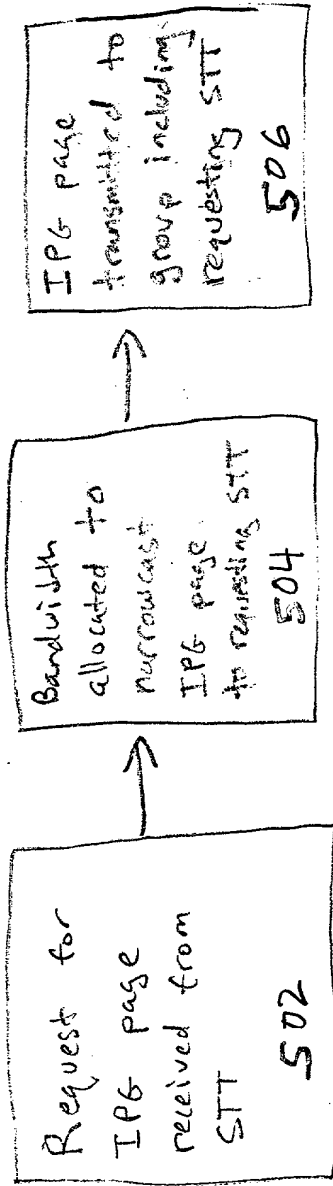


Second Pull Demandcast (Narrowcast) method 500

Fig. 5A

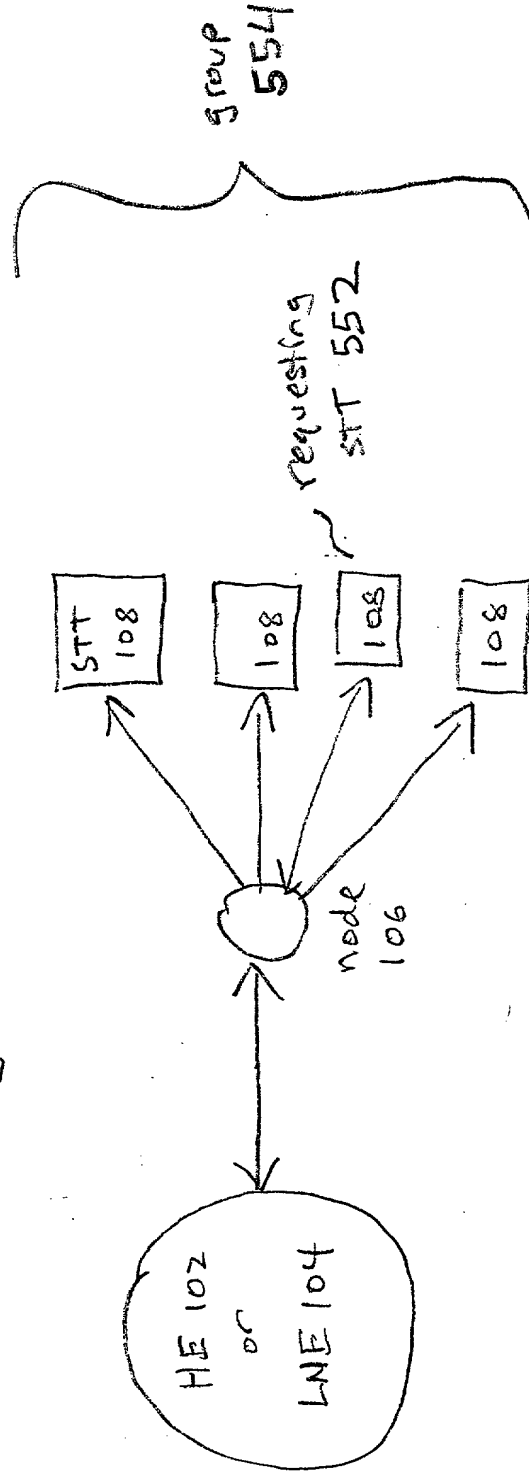


Second Pull Demandcast (Narrowcast) Topology 550

Fig. 5B

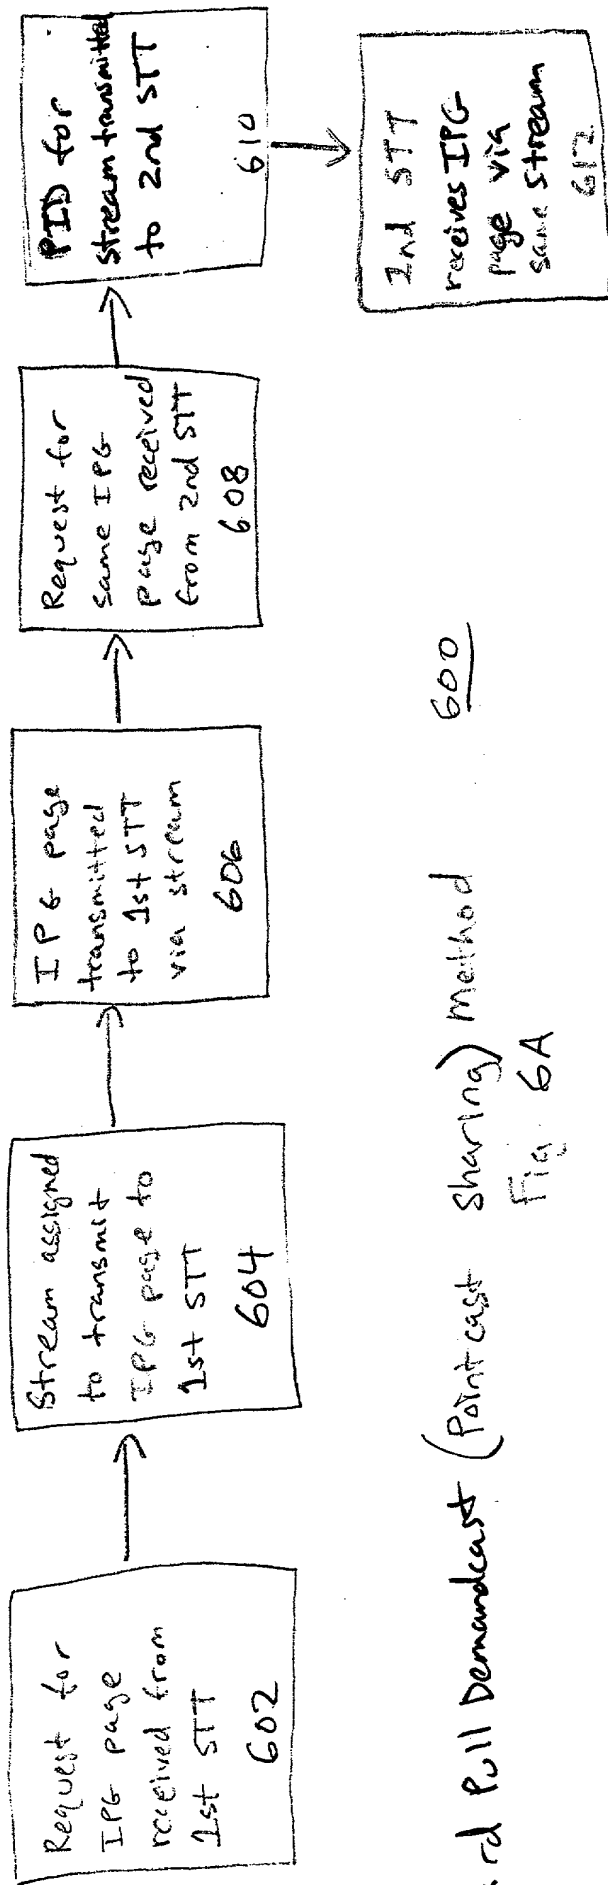

Third Pull Demandcast (Point cast Sharing) method 600
Fig. 6A

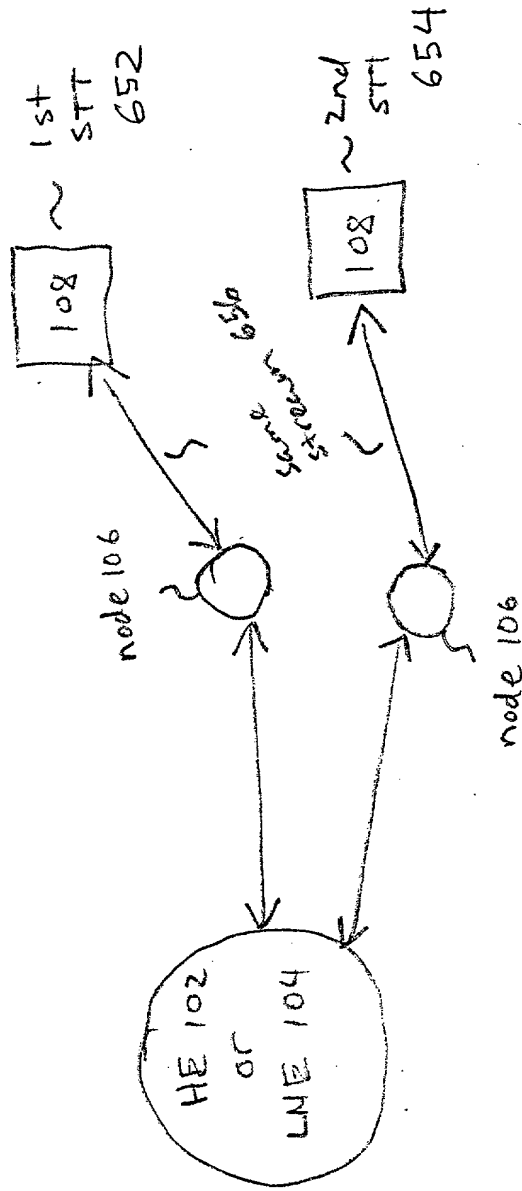

Third Pull Demandcast (Point cast Sharing) Topology 650
Fig. 6B

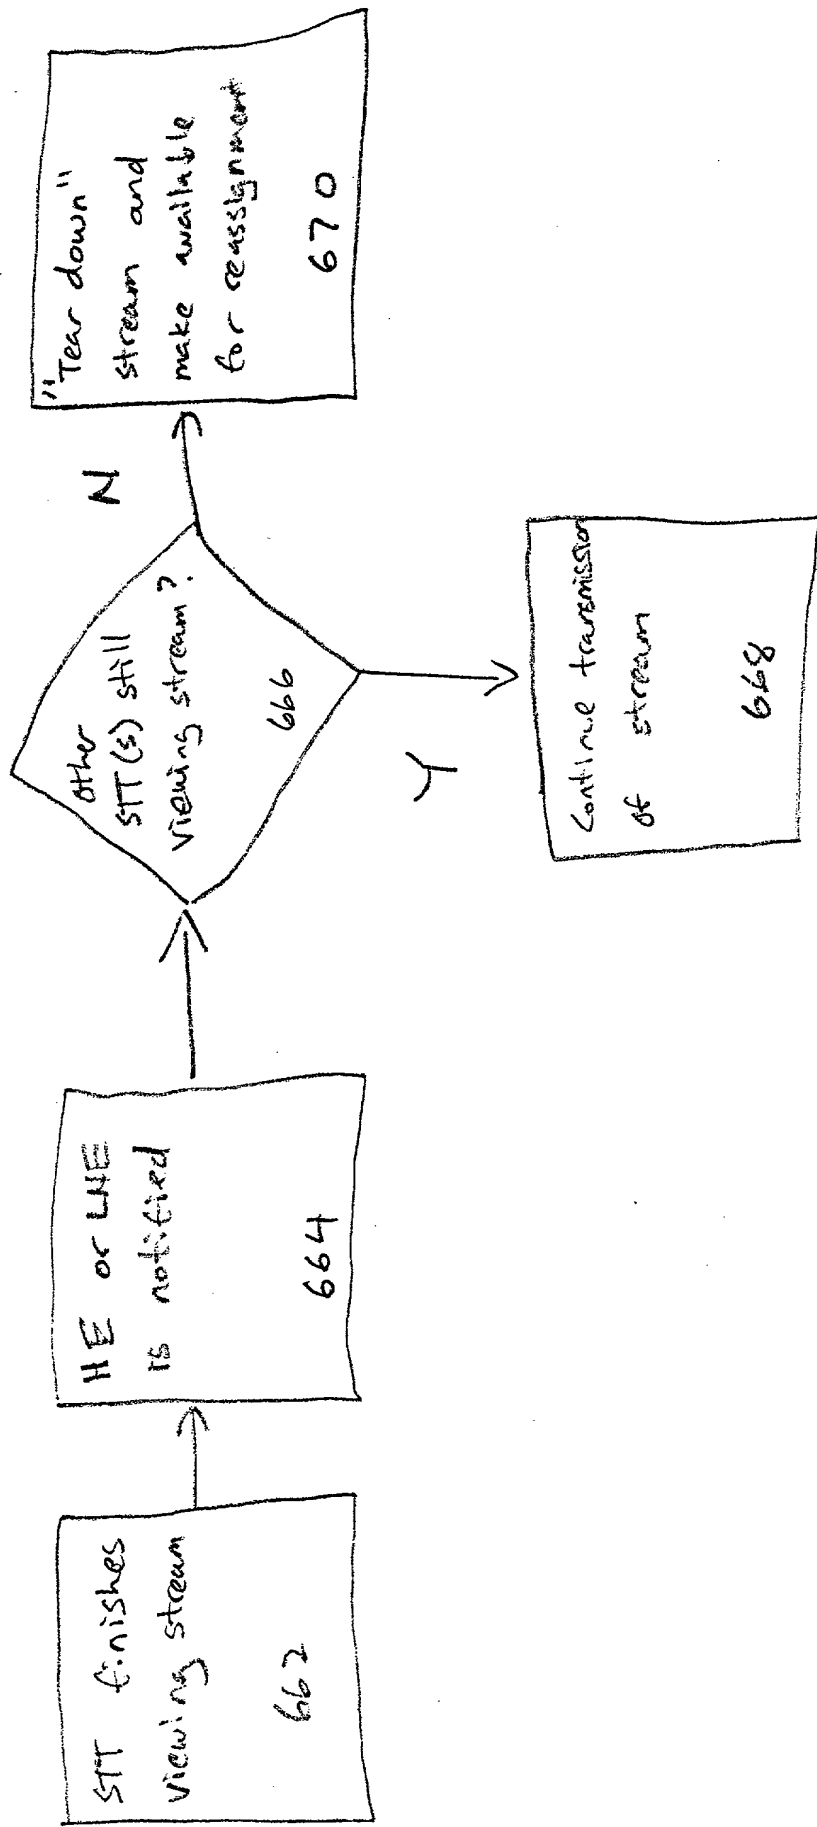


Fig. 6C


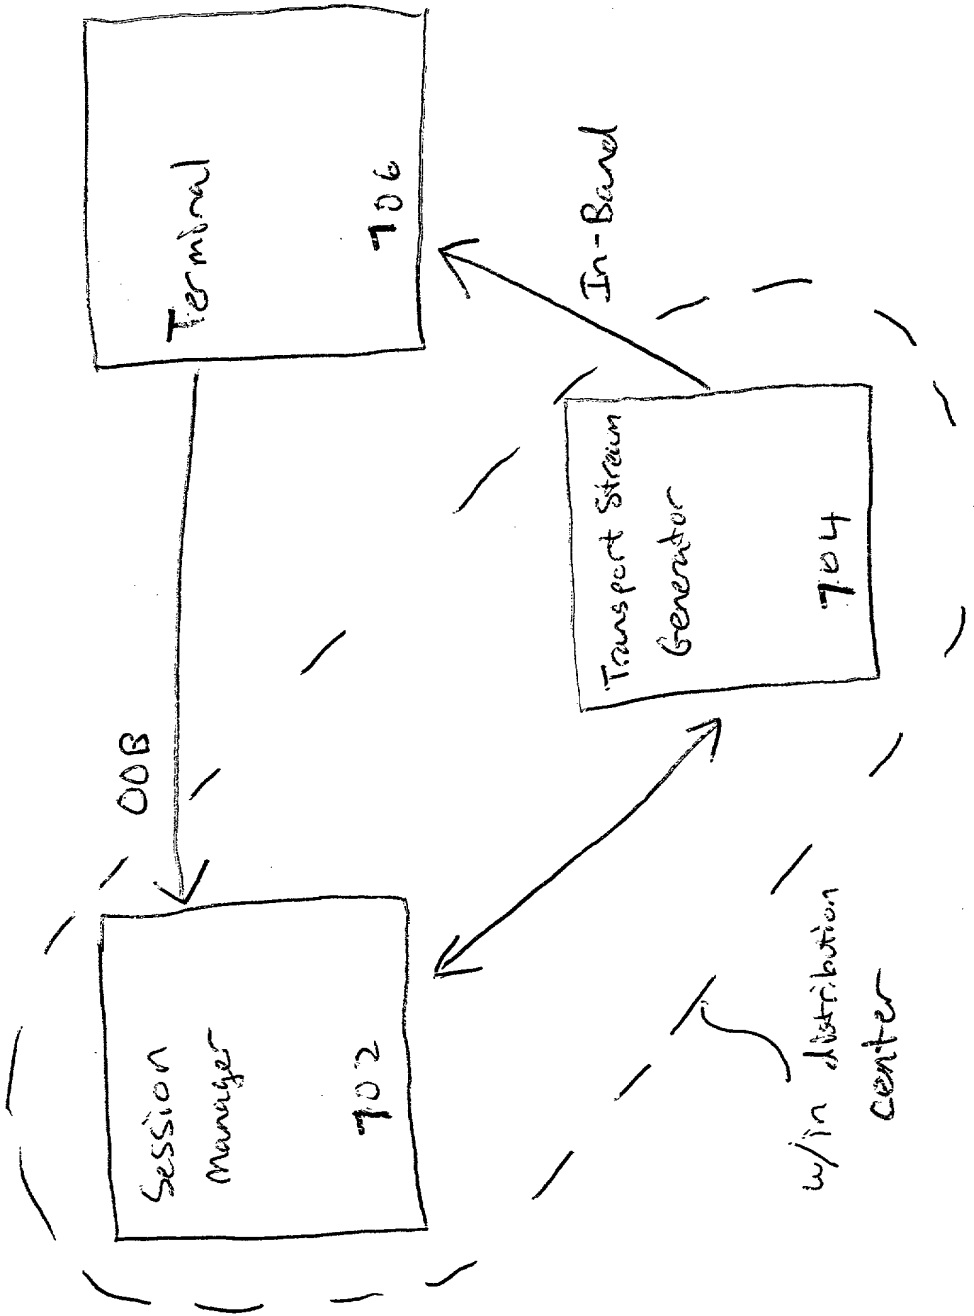


Fig. 3

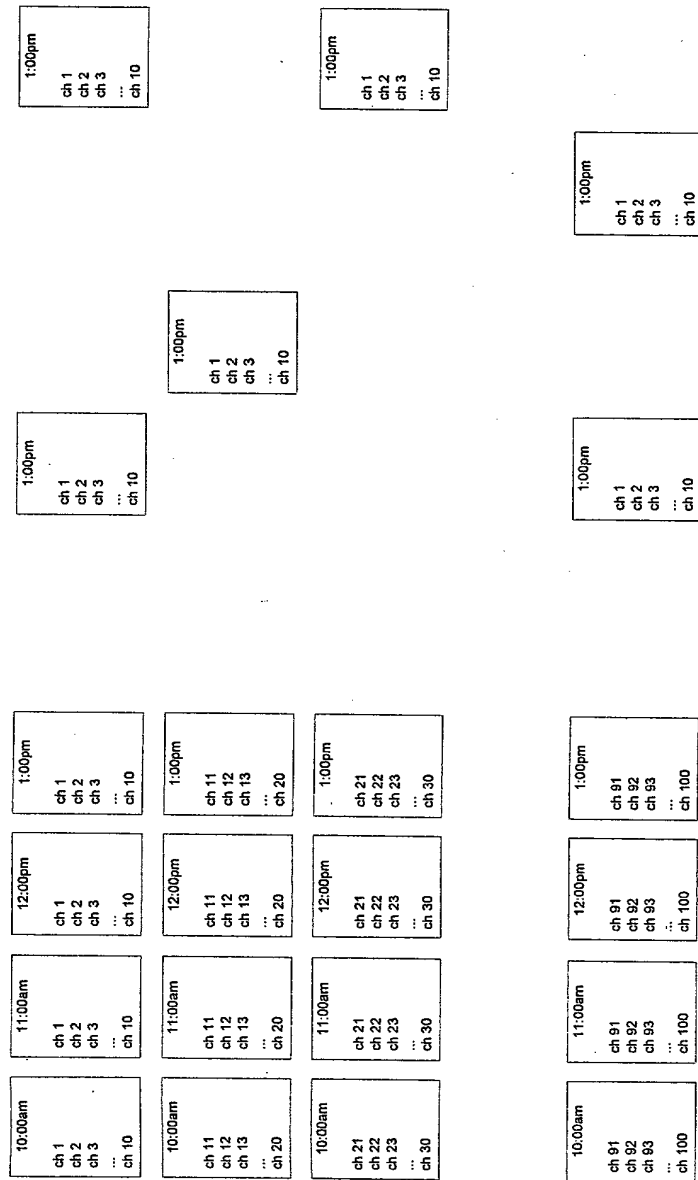


Constant Broadcast Pages = 40 pages.
 Pages are current time + 3 adjacent hours
 look-aheads in guide page matrix.
 Pages are constantly broadcast.

Demandcast Pages = 30 pages.
 Pages are anywhere in guide page matrix
 beyond constantly broadcast pages.

of pages in broadcast = # of constant broadcast pages + # of demandcast pages

of constant broadcast pages = (# of pages per time slot) x (# of time slots in constant broadcast)

Fig. 8

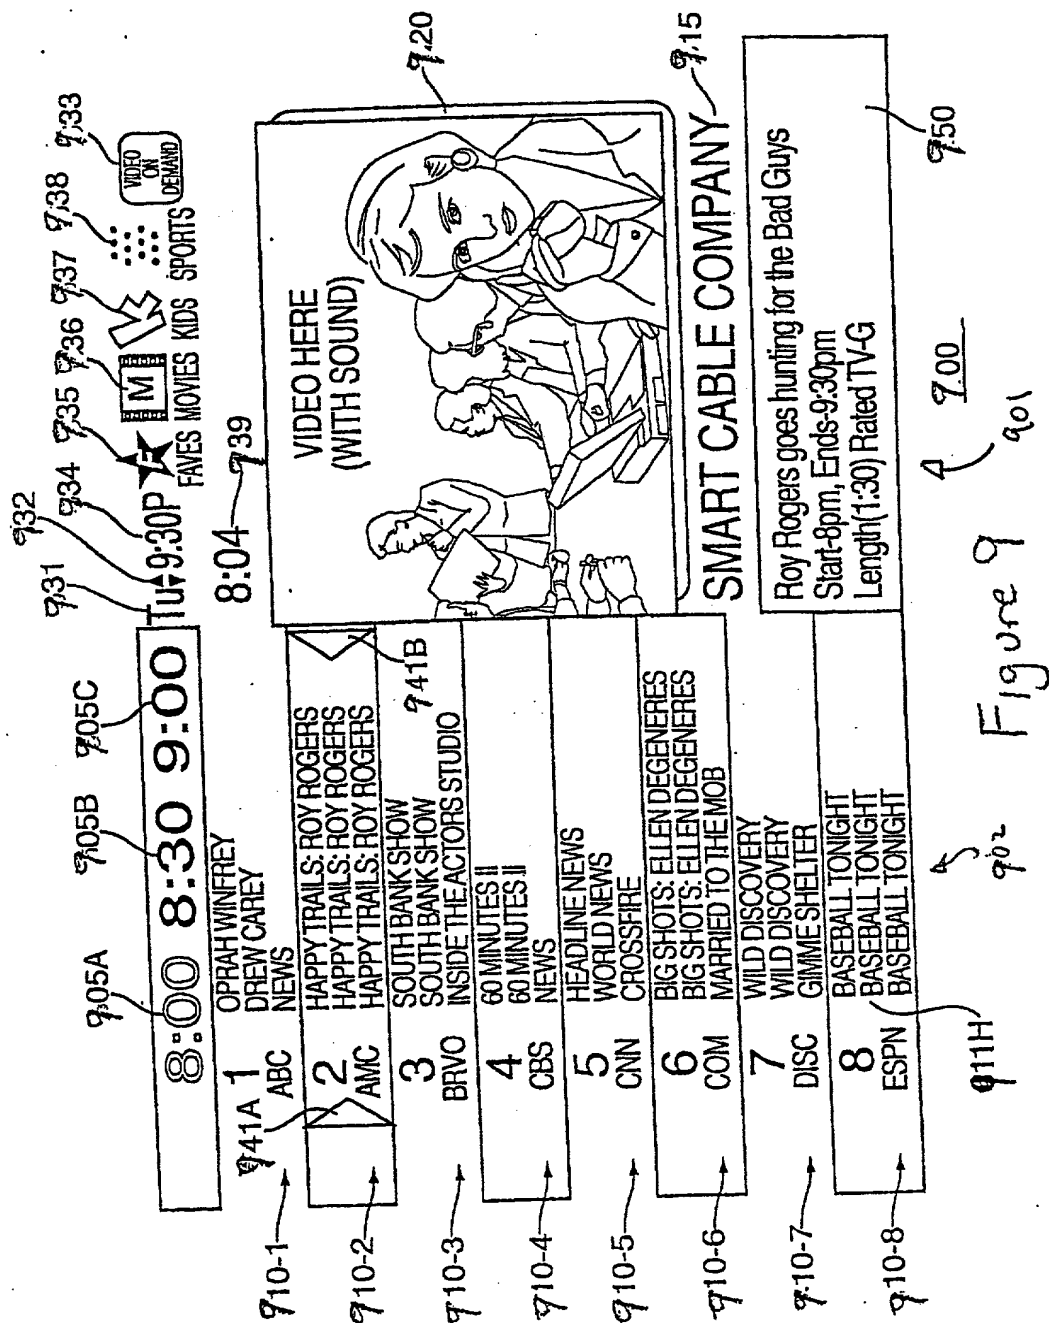

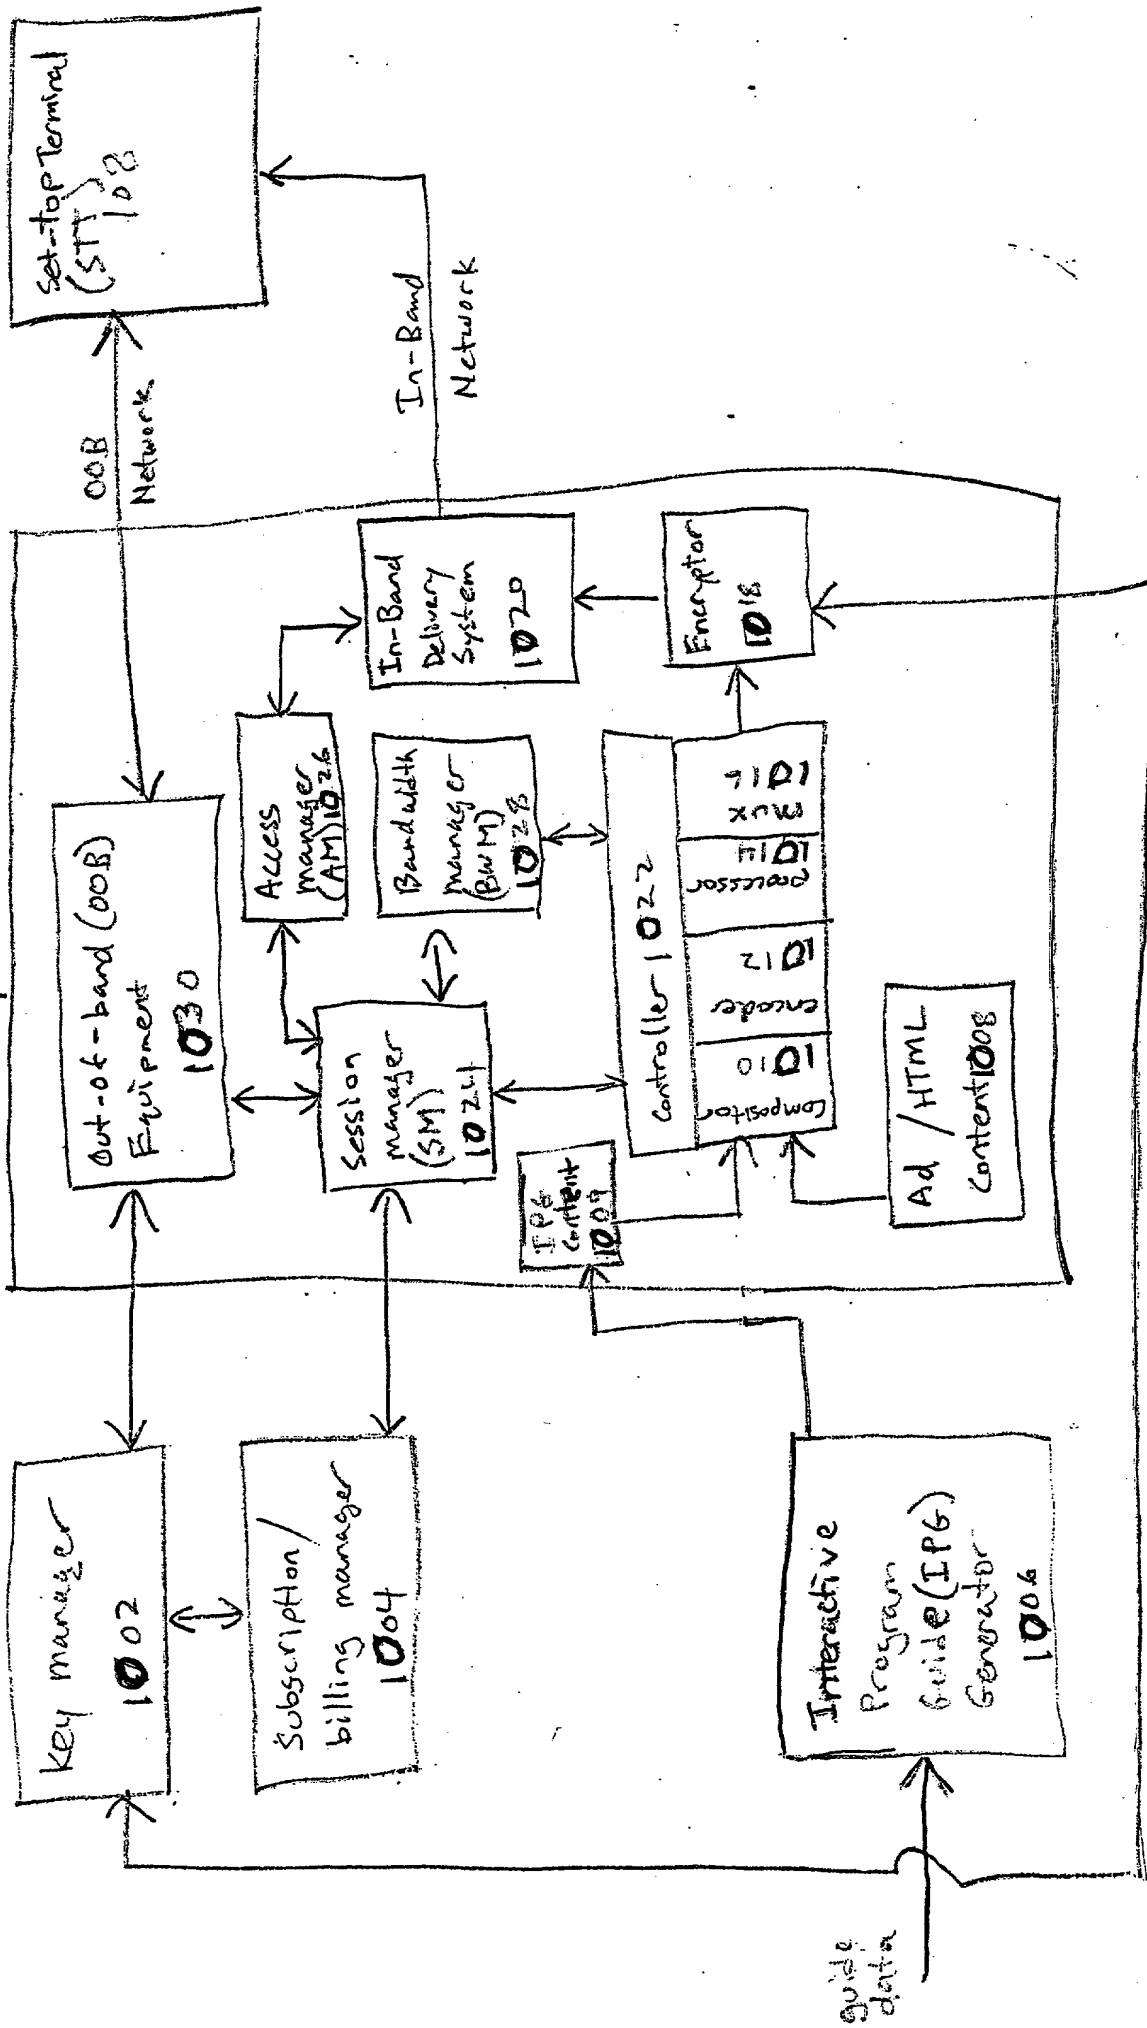


FIG. 10

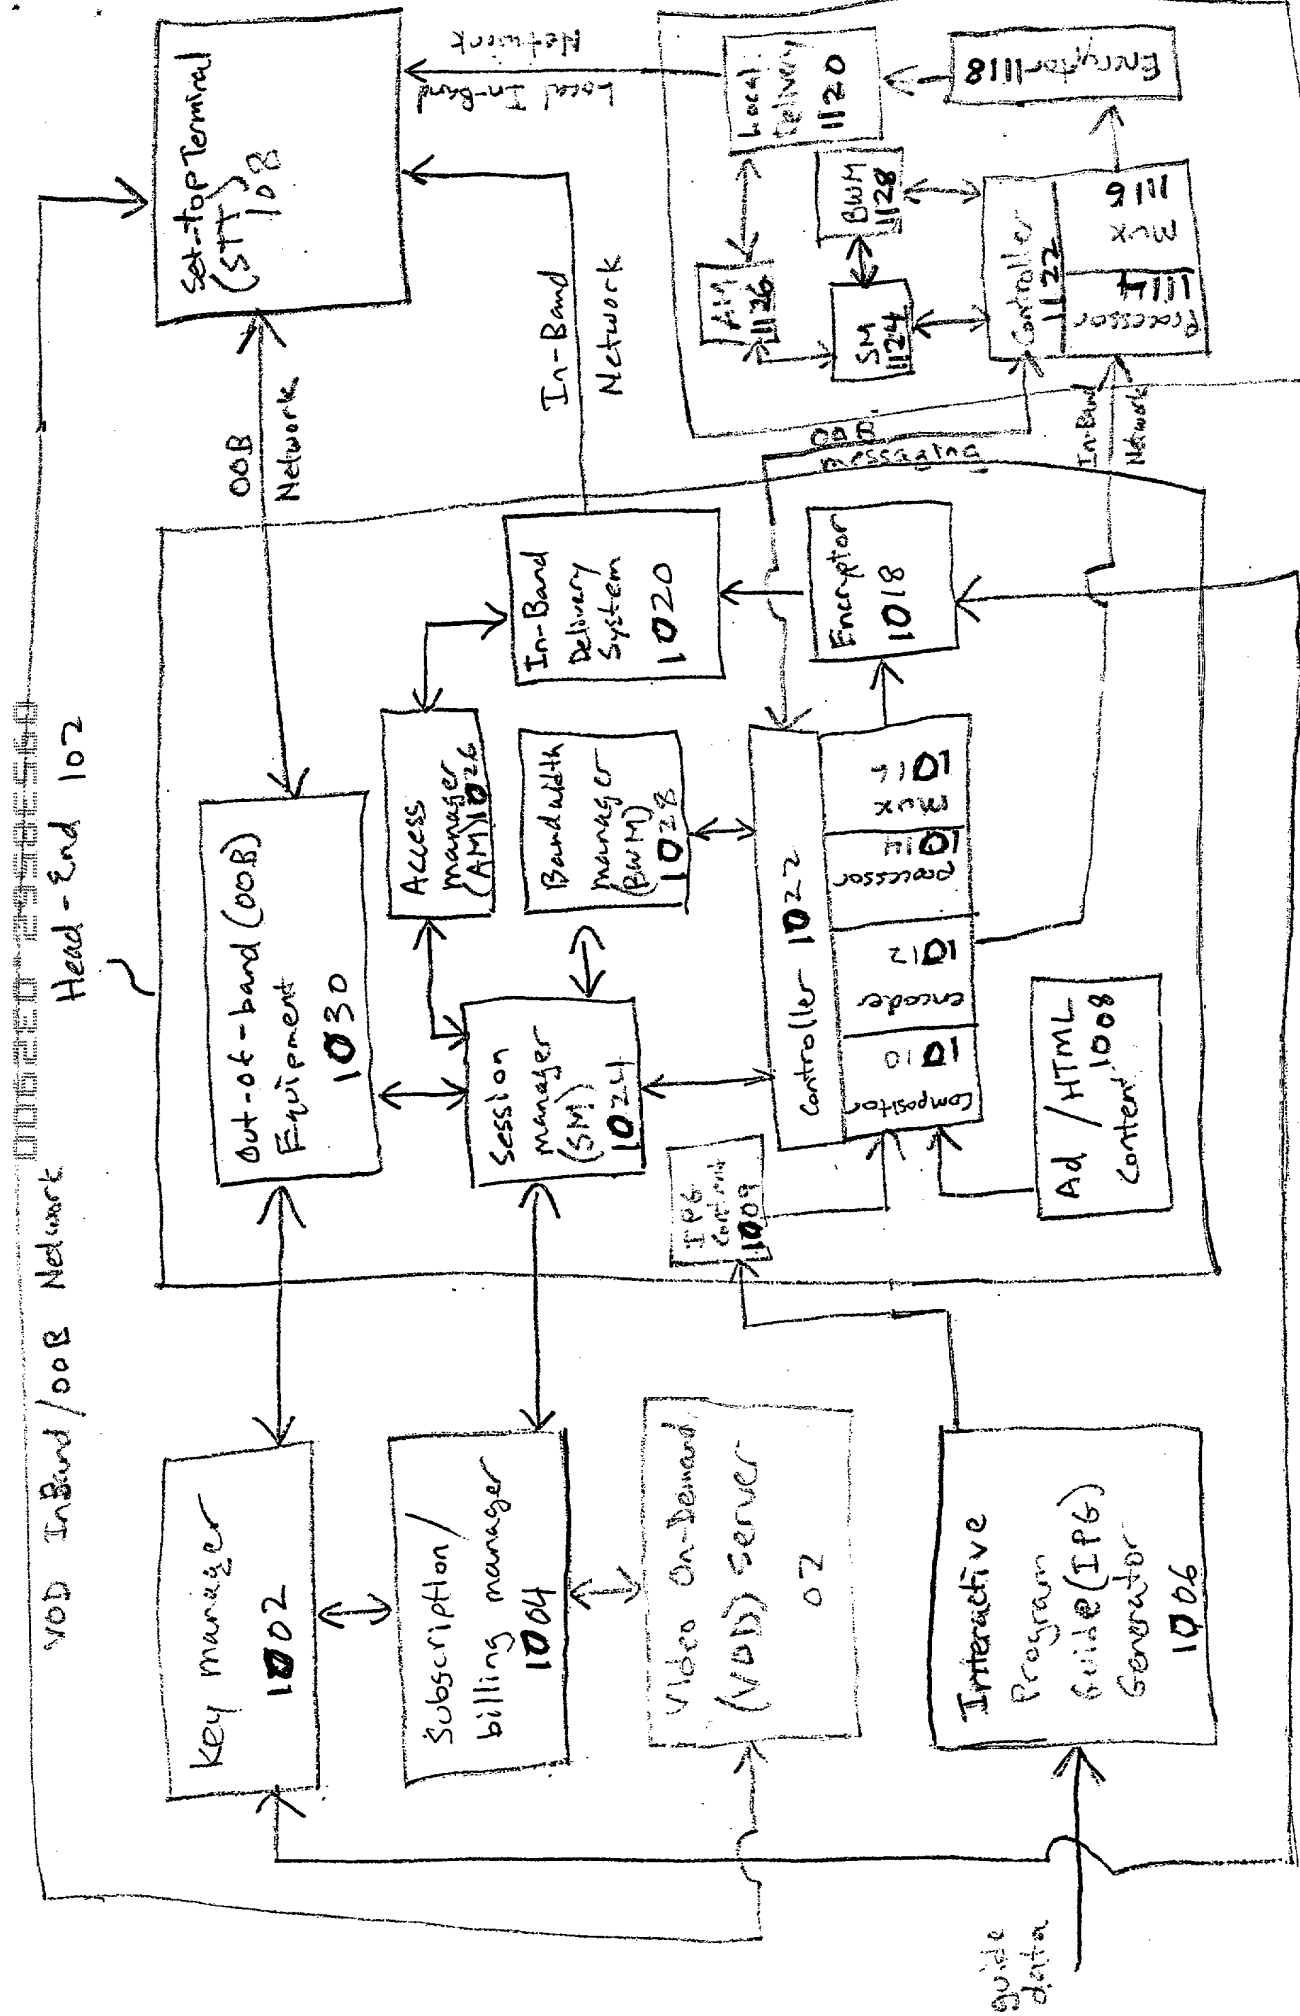


FIG. 11

1100

LINE 104

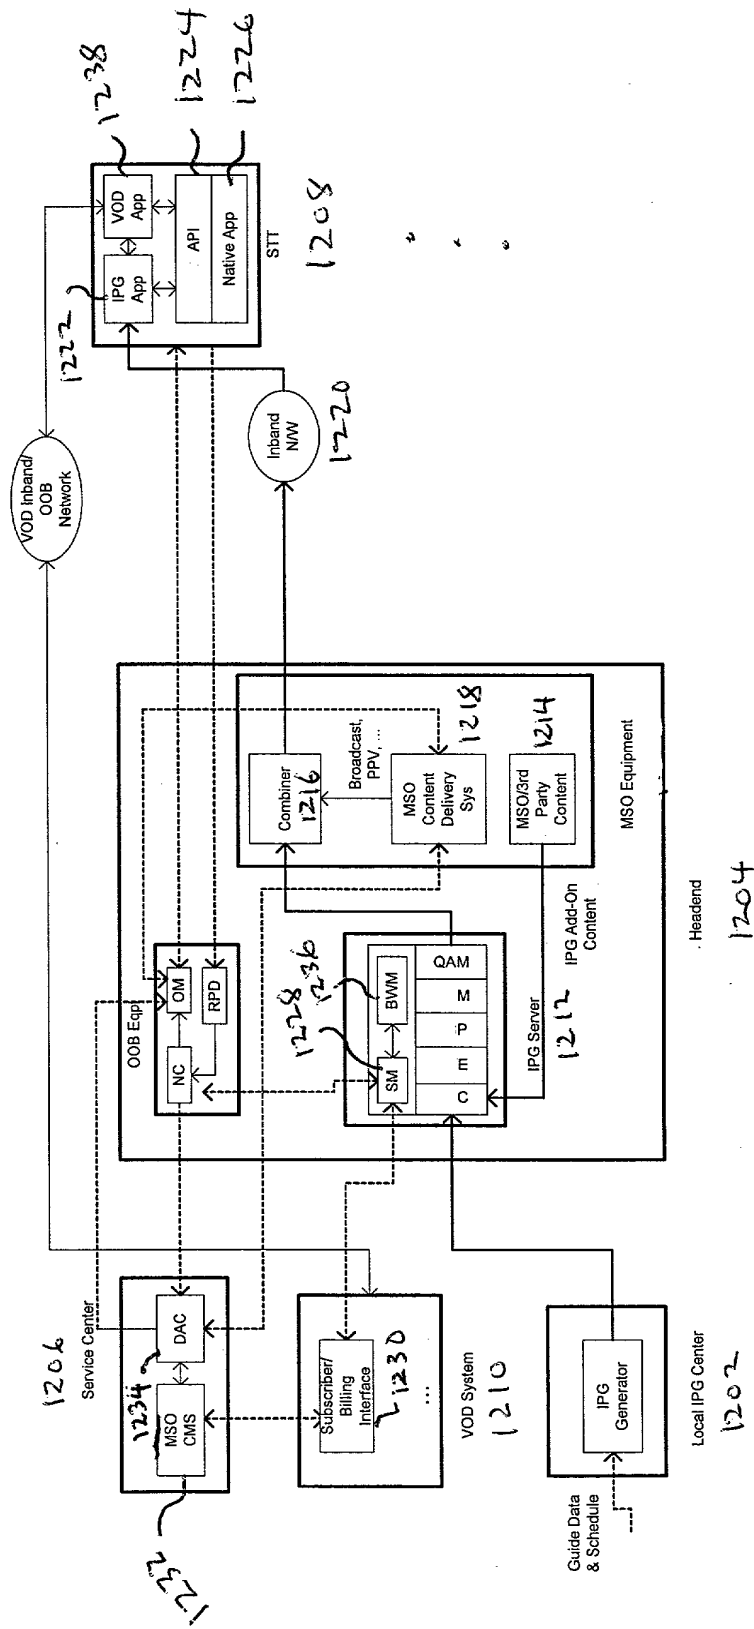


Fig. 12

1200

TSG-to-Terminal Communication:

Contents of Demand-Cast Index Table

table version number (incremented when table content changes)
list of available demand-cast streams
IP address for the source TSG
MUX channel number within the source TSG
time of day and day of week

Fig. 14

Terminal-to-SM Communication:

Message Content

demand-cast stream ID
terminal ID
IP address for the source TSG
MUX channel number within the source TSG
message information (acquisition, release, or request)

Fig. 15

Parameter	1990-1991		1991-1992		1992-1993		1993-1994		1994-1995		1995-1996		1996-1997		1997-1998		1998-1999		1999-2000		2000-2001		2001-2002		2002-2003		2003-2004		2004-2005		2005-2006		2006-2007		2007-2008		2008-2009		2009-2010		2010-2011		2011-2012		2012-2013		2013-2014		2014-2015		2015-2016		2016-2017		2017-2018		2018-2019		2019-2020		2020-2021		2021-2022		2022-2023		2023-2024		2024-2025		2025-2026		2026-2027		2027-2028		2028-2029		2029-2030		2030-2031		2031-2032		2032-2033		2033-2034		2034-2035		2035-2036		2036-2037		2037-2038		2038-2039		2039-2040		2040-2041		2041-2042		2042-2043		2043-2044		2044-2045		2045-2046		2046-2047		2047-2048		2048-2049		2049-2050		2050-2051		2051-2052		2052-2053		2053-2054		2054-2055		2055-2056		2056-2057		2057-2058		2058-2059		2059-2060		2060-2061		2061-2062		2062-2063		2063-2064		2064-2065		2065-2066		2066-2067		2067-2068		2068-2069		2069-2070		2070-2071		2071-2072		2072-2073		2073-2074		2074-2075		2075-2076		2076-2077		2077-2078		2078-2079		2079-2080		2080-2081		2081-2082		2082-2083		2083-2084		2084-2085		2085-2086		2086-2087		2087-2088		2088-2089		2089-2090		2090-2091		2091-2092		2092-2093		2093-2094		2094-2095		2095-2096		2096-2097		2097-2098		2098-2099		2099-2100		2100-2101		2101-2102		2102-2103		2103-2104		2104-2105		2105-2106		2106-2107		2107-2108		2108-2109		2109-2110		2110-2111		2111-2112		2112-2113		2113-2114		2114-2115		2115-2116		2116-2117		2117-2118		2118-2119		2119-2120		2120-2121		2121-2122		2122-2123		2123-2124		2124-2125		2125-2126		2126-2127		2127-2128		2128-2129		2129-2130		2130-2131		2131-2132		2132-2133		2133-2134		2134-2135		2135-2136		2136-2137		2137-2138		2138-2139		2139-2140		2140-2141		2141-2142		2142-2143		2143-2144		2144-2145		2145-2146		2146-2147		2147-2148		2148-2149		2149-2150		2150-2151		2151-2152		2152-2153		2153-2154		2154-2155		2155-2156		2156-2157		2157-2158		2158-2159		2159-2160		2160-2161		2161-2162		2162-2163		2163-2164		2164-2165		2165-2166		2166-2167		2167-2168		2168-2169		2169-2170		2170-2171		2171-2172		2172-2173		2173-2174		2174-2175		2175-2176		2176-2177		2177-2178		2178-2179		2179-2180		2180-2181		2181-2182		2182-2183		2183-2184		2184-2185		2185-2186		2186-2187		2187-2188		2188-2189		2189-2190		2190-2191		2191-2192		2192-2193		2193-2194		2194-2195		2195-2196		2196-2197		2197-2198		2198-2199		2199-2200		2200-2201		2201-2202		2202-2203		2203-2204		2204-2205		2205-2206		2206-2207		2207-2208		2208-2209		2209-2210		2210-2211		2211-2212		2212-2213		2213-2214		2214-2215		2215-2216		2	
-----------	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	-----------	--	---	--

Message Content

demand-cast stream ID
MUX channel number within the source TSG
message/command (stream released, stream requested, or reset)

Fig. 16

TSG-to-SM Communication:

Message Content

demand-cast stream ID
MUX channel number within the source TSG
IP address for the source TSG
acknowledgment (of stream release, of stream request, or of reset)

Fig. 17

A	A	A	A	R	R	R
A	A	A	A	R	R	R
A	A	A	A	R	R	R
A	A	A	R	R	R	P
A	A	A	R	R	R	P

A: acquired streams are in mux and in demand-cast index table

R: released streams are in mux and in demand-cast index table. They can be turned into passive streams.

P: passive streams are technically released. They are not in the demand-cast index table. They are removable.

active demand-cast streams are in IPG multiplex

TSG Demand-cast Stream Status

Fig. 18

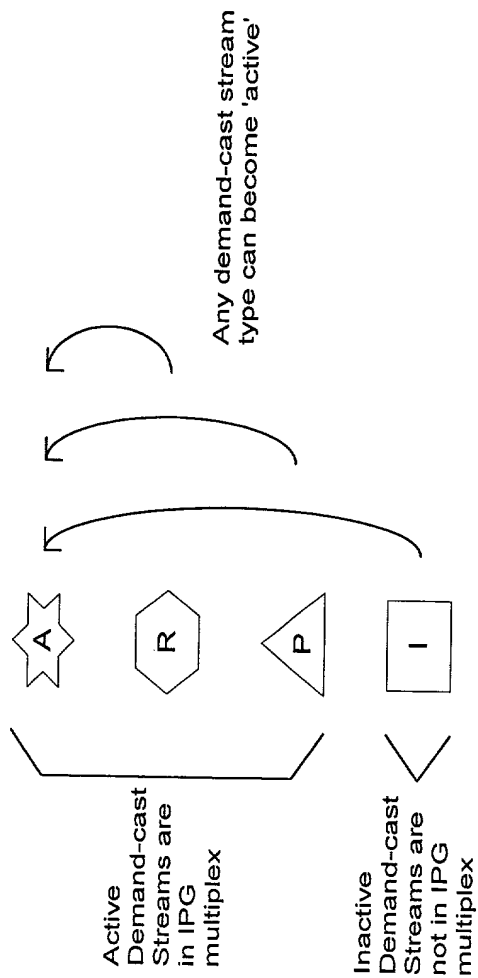


Fig. 19

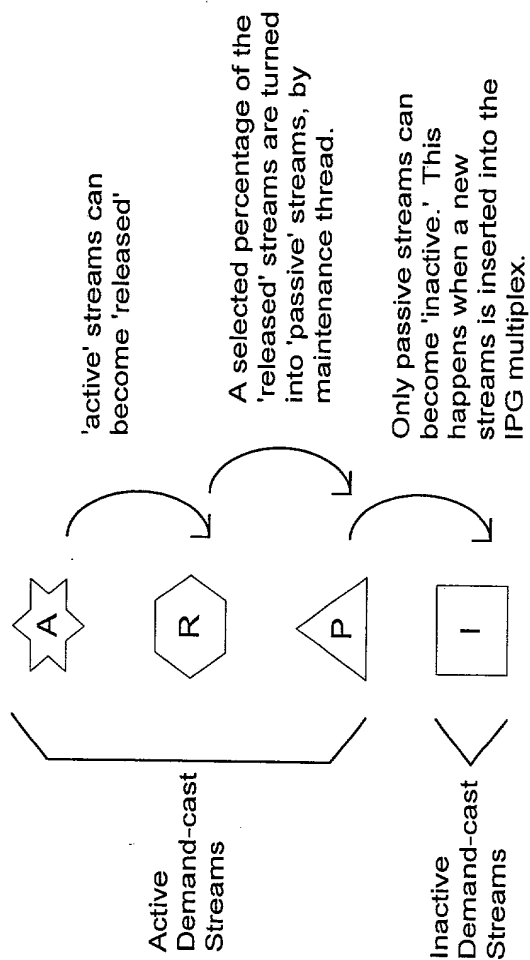


Fig. 20

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: **DEMAND-CAST SYSTEM AND BANDWIDTH MANAGEMENT FOR DELIVERY OF INTERACTIVE PROGRAMMING** the specification of which X is attached hereto or ____ was filed on _____ as Application No. _____ and was amended on _____ (if applicable).

I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56. I claim foreign priority benefits under Title 35, United States Code, Section 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Country	Application No.	Date of Filing	Priority Claimed Under 35 USC 119

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

Application No.	Filing Date
60/178,100	January 26, 2000

I claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Application No.	Date of Filing	Status
09/524,854	March 14, 2000	Pending

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

James K. Okamoto, Reg. No. 40,110
William L. Shaffer, Reg. No. 37,234

Send Correspondence to: TOWNSEND and TOWNSEND and CREW LLP Two Embarcadero Center, 8th Floor San Francisco, California 94111-3834	Direct Telephone Calls to: (Name, Reg. No., Telephone No.) Name: James K. Okamoto Reg. No.: 40,110 Telephone: 650-326-2400
--	--

Full Name of Inventor 1:	Last Name: GORDON	First Name: DONALD	Middle Name or Initial: F.	
Residence & Citizenship:	City: Los Altos	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 465 Gabilan Street #10	City: Los Altos	State/Country: California	Postal Code: 94022
Full Name of Inventor 2:	Last Name: BAYRAKERI	First Name: SADIK	Middle Name or Initial:	
Residence & Citizenship:	City: Foster City	State/Foreign Country: California	Country of Citizenship: Turkey	
Post Office Address:	Post Office Address: 733 Shell Boulevard #104	City: Foster City	State/Country: California	Postal Code: 94404
Full Name of Inventor 3:	Last Name: LUDVIG	First Name: EDWARD	Middle Name or Initial: A.	
Residence & Citizenship:	City: Redwood City	State/Foreign Country: California	Country of Citizenship: Canada	
Post Office Address:	Post Office Address: 831 Canyon Road	City: Redwood City	State/Country: California	Postal Code: 94061
Full Name of Inventor 4:	Last Name: GERSHTEIN	First Name: EUGENE	Middle Name or Initial:	
Residence & Citizenship:	City: Redwood Shores	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 401B Cork Harbour Circle	City: Redwood Shores	State/Country: California	Postal Code: 94065
Full Name of Inventor 5:	Last Name: EDMONDS	First Name: JEREMY	Middle Name or Initial: S.	
Residence & Citizenship:	City: Castro Valley	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 18923 Sydney Circle	City: Castro Valley	State/Country: California	Postal Code: 94546
Full Name of Inventor 6:	Last Name: COMITO	First Name: JOHN	Middle Name or Initial: P.	
Residence & Citizenship:	City: Redwood City	State/Foreign Country: California	Country of Citizenship: United States	
Post Office Address:	Post Office Address: 907 Pleasant Hill Road	City: Redwood City	State/Country: California	Postal Code: 94061
Full Name of Inventor 7:	Last Name: LI	First Name: ALFRED	Middle Name or Initial:	
Residence & Citizenship:	City: Redwood City	State/Foreign Country: California	Country of Citizenship: Hong Kong	
Post Office Address:	Post Office Address: 161 Positano Circle	City: Redwood City	State/Country: California	Postal Code: 94065

I further declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Signature of Inventor 1 _____ Donald F. Gordon	Signature of Inventor 2 _____ Sadik Bayrakeri	Signature of Inventor 3 _____ Edward A. Ludvig
Date	Date	Date
Signature of Inventor 4 _____ Eugene Gershtein	Signature of Inventor 5 _____ Jeremy S. Edmonds	Signature of Inventor 6 _____ John P. Comito
Date	Date	Date
Signature of Inventor 7 _____ Alfred Li		
Date		

PA 3060711 v1